



CHAIN SLINGS

ADJUSTABLE CHAIN SLINGS***

Grade	Chain Size (in.)	¹ Rated Capacity* (lbs.)	
		Single @ 90°	Double @ 60°
100	7/32	2,700	4,700
100	9/32	4,300	7,400
100	3/8	8,800	15,200
100	1/2	15,000	26,000
100	5/8	22,600	39,100
100	3/4	35,300	61,100
80	7/8	34,200	59,200
80	1	47,700	82,600
80	1-1/4	72,300	125,200

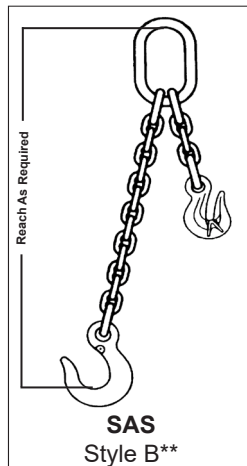

SAS
Style B**

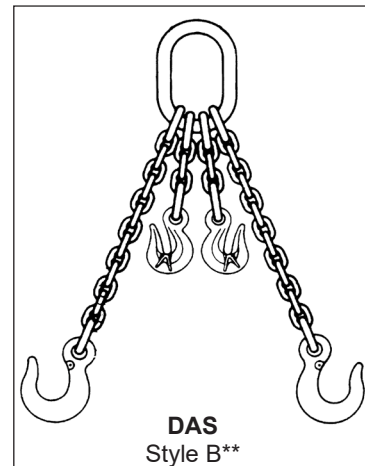


DAS
Style B**

*** Cradle grab hooks standard; non-cradle hooks available on request. ** Style B slings are furnished with approximately one foot of chain. When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.


TRIPLE & QUAD ADJUSTABLE CHAIN SLINGS***

Chain Size (in.)	¹ Rated Capacity* (lbs.) @ 60°	
	Grade 80	Grade 100
7/32	5,450	7,000
9/32	9,100	11,200
3/8	18,400	22,900
1/2	31,200	39,000
5/8	47,000	58,700
3/4	73,500	91,700
7/8	88,900	-
1	123,900	-
1-1/4	187,800	-

*** Cradle grab hooks standard; non-cradle hooks available on request. When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

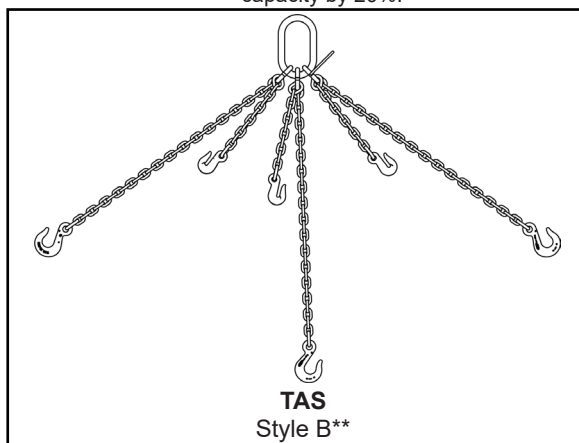


TAS
Style B**

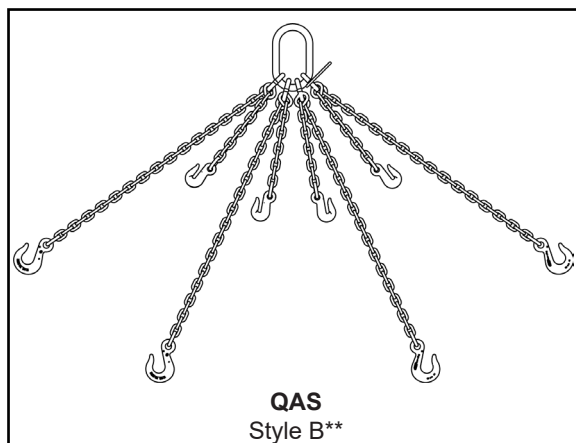

QAS
Style B**

** Style B slings are furnished with approximately one foot of chain.

*  **WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the chain chart on this page and the Effect of Angle chart in the General Information section of this catalog.