
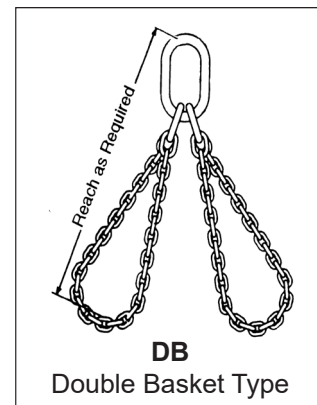


## CHAIN SLINGS

### BASKET TYPE CHAIN SLINGS

Grade	Chain Size (in.)	<sup>1</sup> Rated Capacity* @ 60° (lbs.)	
		Single	Double
100	7/32	4,700	7,000
100	9/32	7,400	11,200
100	3/8	15,200	22,900
100	1/2	26,000	39,000
100	5/8	39,100	58,700
100	3/4	61,100	91,700
80	7/8	59,200	88,900
80	1	82,600	123,900
80	1-1/4	125,200	187,800

<sup>1</sup> Rated Capacity also referred to as Working Load Limit.


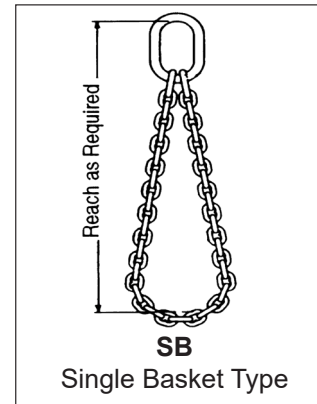


### ENDLESS BASKET CHAIN SLINGS<sup>2</sup>

Grade	Chain Size (in.)	<sup>1</sup> Rated Capacity* (lbs.)	
		Single @ 90°	Double @ 60°
100	7/32	2,700	4,700
100	9/32	4,300	7,400
100	3/8	8,800	15,200
100	1/2	15,000	26,000
100	5/8	22,600	39,100
100	3/4	35,300	61,100
80	7/8	34,200	59,200
80	1	47,700	82,600
80	1-1/4	72,300	125,200

<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

<sup>2</sup> Available as welded assembly only.

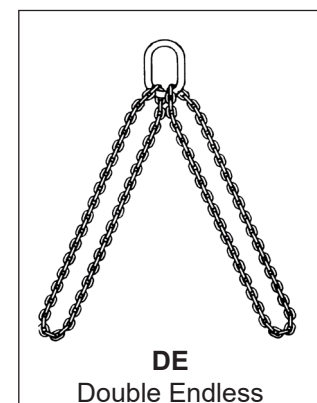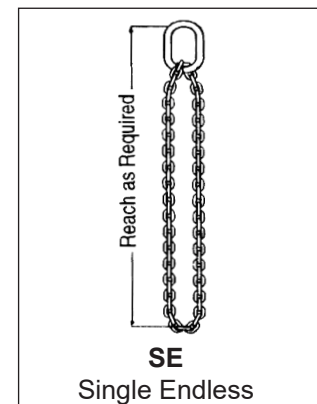

**\* WARNING**

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the chain chart on this page and the Effect of Angle chart in the General Information section of this catalog.