


## CHAIN SLINGS

### SINGLE CHAIN SLINGS

| Grade | Chain Size (in.) | <sup>1</sup> Rated Capacity* Vertical (lbs.) | Approx. Weight 5-ft Reach Type SOS (lbs.) |
|-------|------------------|--|---|
| 100   | 7/32             | 2,700  | 4   |
| 100   | 9/32             | 4,300  | 5   |
| 100   | 3/8              | 8,800  | 10  |
| 100   | 1/2              | 15,000                                       | 18  |
| 100   | 5/8              | 22,600                                       | 27  |
| 100   | 3/4              | 35,300                                       | 44  |
| 80    | 7/8              | 34,200                                       | 58  |
| 80    | 1                | 47,700                                       | 79  |
| 80    | 1-1/4            | 72,300                                       | 121                                       |

<sup>1</sup> Rated Capacity also referred to as Working Load Limit.  
When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

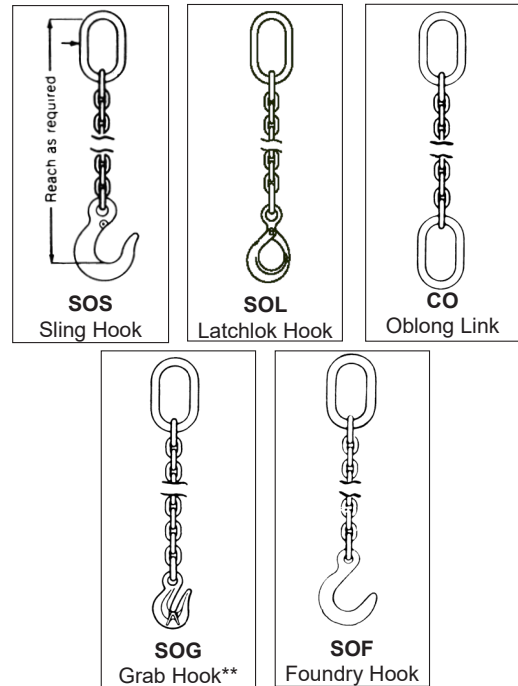


\*\*Cradle grab hooks are standard, non-cradle hooks available on request.

### DOUBLE CHAIN SLINGS

| Grade | Chain Size (in.) | <sup>1</sup> Rated Capacity* @ 60° (lbs.) | Approx. Weight 5-ft. Reach Type DOS (lbs.) |
|-------|------------------|---|--|
| 100   | 7/32             | 4,700                                     | 8  |
| 100   | 9/32             | 7,400                                     | 10   |
| 100   | 3/8              | 15,200                                    | 17   |
| 100   | 1/2              | 26,000                                    | 32   |
| 100   | 5/8              | 39,100                                    | 51   |
| 100   | 3/4              | 61,100                                    | 74   |
| 80    | 7/8              | 59,200                                    | 99   |
| 80    | 1                | 82,600                                    | 134  |
| 80    | 1-1/4            | 125,200                                   | 211  |

<sup>1</sup> Rated Capacity also referred to as Working Load Limit.  
When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

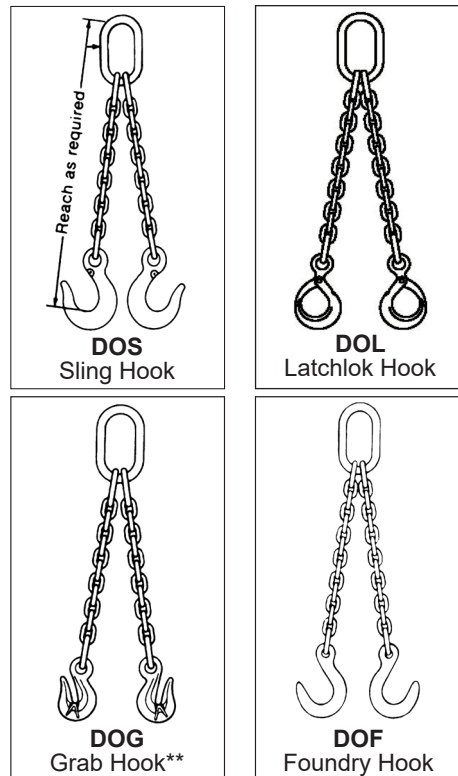

\*\*Cradle grab hooks are standard, non-cradle hooks available on request.

**\* WARNING**

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the chain chart on this page and the Effect of Angle chart in the General Information section of this catalog.



## CHAIN SLINGS

### TRIPLE & QUAD CHAIN SLINGS

| Grade | Chain Size (in.) | <sup>1</sup> Rated Capacity* @ 60° (lbs.) | Approx. Weight 5-ft. Reach Type TOS (lbs.) | Approx. Weight 5-ft. Reach Type QOS (lbs. ) |
|-------|------------------|---|--|---|
| 100   | 7/32             | 7,000                                     | 12   | 16  |
| 100   | 9/32             | 11,200                                    | 16   | 19  |
| 100   | 3/8              | 22,900                                    | 28   | 36  |
| 100   | 1/2              | 39,000                                    | 53   | 63  |
| 100   | 5/8              | 58,700                                    | 81   | 100   |
| 100   | 3/4              | 91,700                                    | 116  | 140   |
| 80    | 7/8              | 88,900                                    | 154  | 187   |
| 80    | 1                | 123,900                                   | 209  | 250   |
| 80    | 1-1/4            | 187,800                                   | 358  | 406   |



<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

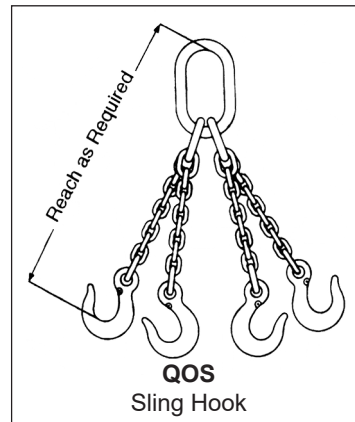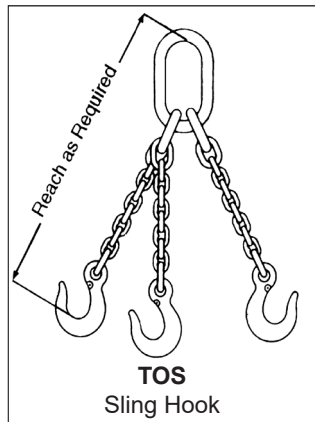

### ADJUSTABLE LOOP CHAIN SLINGS\*\*\*

| Grade | Chain Size (in.) | <sup>1</sup> Rated Capacity* @ 60° (lbs.) |         |
|-------|------------------|---|---------|
|       |                  | Single                                    | Double  |
| 100   | 7/32             | 4,700                                     | 7,000   |
| 100   | 9/32             | 7,400                                     | 11,200  |
| 100   | 3/8              | 15,200                                    | 22,900  |
| 100   | 1/2              | 26,000                                    | 39,400  |
| 100   | 5/8              | 39,100                                    | 58,700  |
| 100   | 3/4              | 61,100                                    | 91,700  |
| 80    | 7/8              | 59,200                                    | 88,900  |
| 80    | 1                | 82,600                                    | 123,900 |
| 80    | 1-1/4            | 125,200                                   | 187,800 |

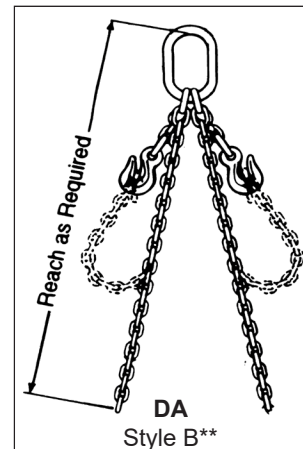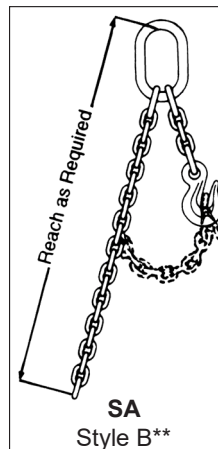

\*\*\* Cradle grab hooks standard; non-cradle hooks available on request. \*\* Style B slings are furnished with approximately one foot of chain. When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

\* **WARNING**

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the chain chart on this page and the Effect of Angle chart in the General Information section of this catalog.