


## CHAIN SLINGS

### SINGLE CHAIN SLINGS

Grade	Chain Size (in.)	<sup>1</sup> Rated Capacity* Vertical (lbs.)	Approx. Weight 5-ft Reach Type SOS (lbs.)
100	7/32	2,700	4
100	9/32	4,300	5
100	3/8	8,800	10
100	1/2	15,000	18
100	5/8	22,600	27
100	3/4	35,300	44
80	7/8	34,200	58
80	1	47,700	79
80	1-1/4	72,300	121

<sup>1</sup> Rated Capacity also referred to as Working Load Limit.  
When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

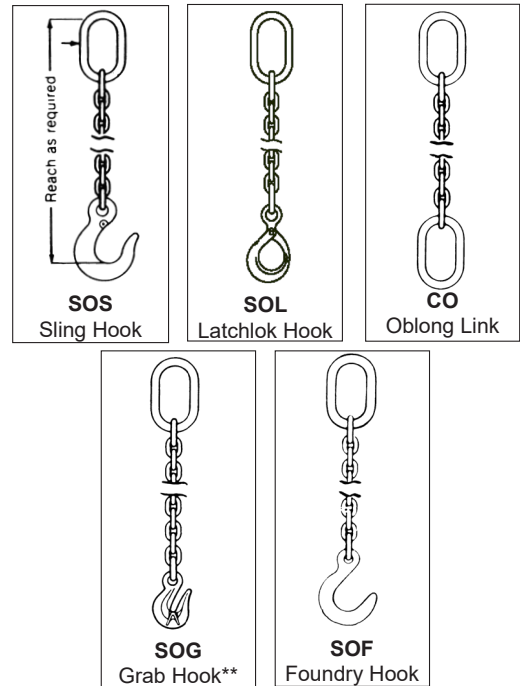


\*\*Cradle grab hooks are standard, non-cradle hooks available on request.

### DOUBLE CHAIN SLINGS

Grade	Chain Size (in.)	<sup>1</sup> Rated Capacity* @ 60° (lbs.)	Approx. Weight 5-ft. Reach Type DOS (lbs.)
100	7/32	4,700	8
100	9/32	7,400	10
100	3/8	15,200	17
100	1/2	26,000	32
100	5/8	39,100	51
100	3/4	61,100	74
80	7/8	59,200	99
80	1	82,600	134
80	1-1/4	125,200	211

<sup>1</sup> Rated Capacity also referred to as Working Load Limit.  
When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

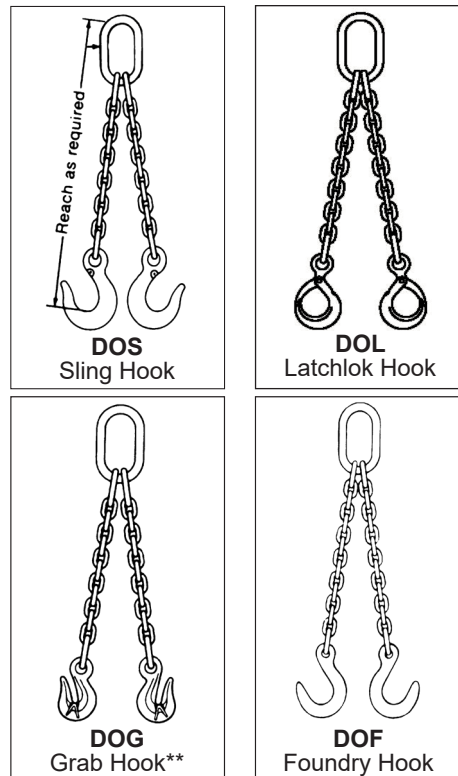

\*\*Cradle grab hooks are standard, non-cradle hooks available on request.

**\* WARNING**

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the chain chart on this page and the Effect of Angle chart in the General Information section of this catalog.

- General Information
- Web Slings
- Round Slings
- Sling Protection
- Wire Rope
- Chain Slings
- Rigging Hardware
- Mesh Slings
- Load Huggers
- Tow Products
- Lift-All Hoists
- Hoist Rings
- Plate Clamps
- Lifting Devices



## CHAIN SLINGS

### TRIPLE & QUAD CHAIN SLINGS

Grade	Chain Size (in.)	<sup>1</sup> Rated Capacity* @ 60° (lbs.)	Approx. Weight 5-ft. Reach Type TOS (lbs.)	Approx. Weight 5-ft. Reach Type QOS (lbs. )
100	7/32	7,000	12	16
100	9/32	11,200	16	19
100	3/8	22,900	28	36
100	1/2	39,000	53	63
100	5/8	58,700	81	100
100	3/4	91,700	116	140
80	7/8	88,900	154	187
80	1	123,900	209	250
80	1-1/4	187,800	358	406



<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

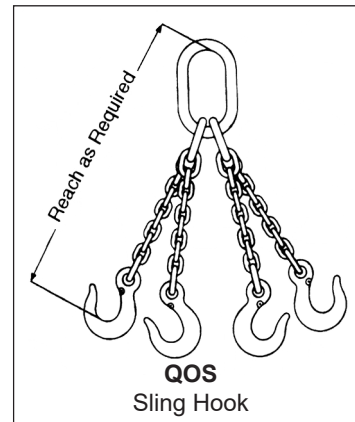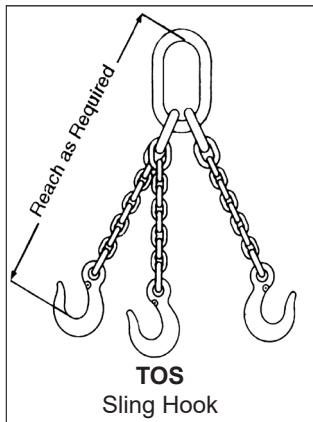

### ADJUSTABLE LOOP CHAIN SLINGS\*\*\*

Grade	Chain Size (in.)	<sup>1</sup> Rated Capacity* @ 60° (lbs.)	
		Single	Double
100	7/32	4,700	7,000
100	9/32	7,400	11,200
100	3/8	15,200	22,900
100	1/2	26,000	39,400
100	5/8	39,100	58,700
100	3/4	61,100	91,700
80	7/8	59,200	88,900
80	1	82,600	123,900
80	1-1/4	125,200	187,800

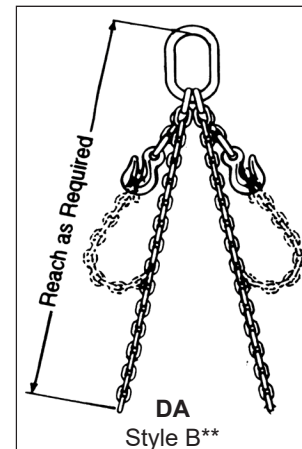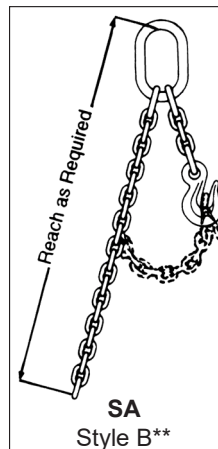

\*\*\* Cradle grab hooks standard; non-cradle hooks available on request. \*\* Style B slings are furnished with approximately one foot of chain. When using chain slings in a choke hitch, reduce the sling's rated capacity by 20%.

\* **WARNING**

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the chain chart on this page and the Effect of Angle chart in the General Information section of this catalog.