

SYNTHETIC WEB BRIDLE SLINGS

Bridle Slings are useful when fixed lifting points are available.

Features and Benefits

Promotes Safety

- *Tuff-Edge*® III web material is standard; helps prevent sling damage.
- Better load control and balance by using fixed connection points and multiple legs.
- Standard oblong links and hooks are forged from alloy steel for strength and reliability.
- Red core yarn warning system aids in the inspection process.
- Use of hardware prevents cutting and abrasion of sling at bearing points.
- *Tuff-Tag*™ provides serial numbered identification for traceability.
- Proven reliability.
- Wide widths available up to 12".

Saves Time


- Lighter weight and easier to use than chain or wire rope.
- Sling hooks quickly connect to loads having hoist rings or eye bolts.

Saves Money


- Soft web sling legs protect load.
- Endless configuration allows shifting of wear points.
- Edge Damage Limit (EDL), out-of-service marker aids in sling inspection (refer to TEIII Web Sling Safety Bulletin).
- Sling hooks and links can be re-webbed.
- *Tuff-Tag* provides required OSHA information for the life of the sling.
- Tapered eyes for better sling leg equalization, standard for 2" or wider.



HOW TO ORDER WEB BRIDLE SLINGS

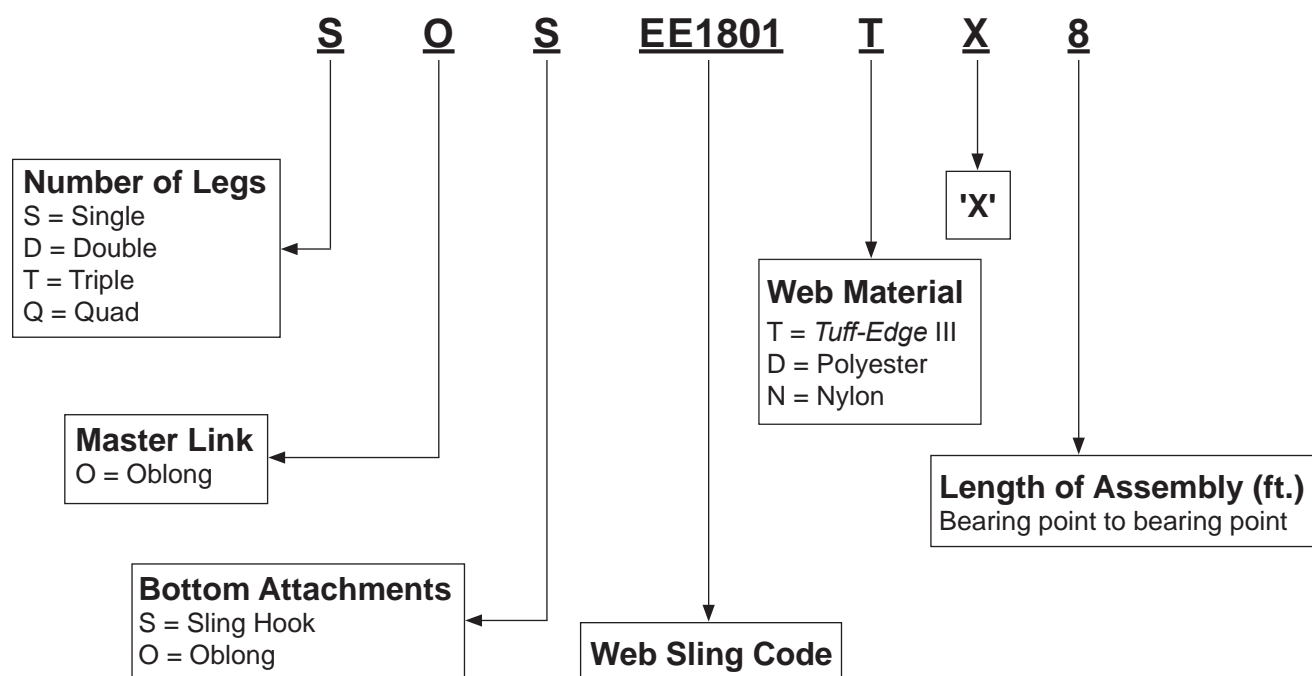

SYNTHETIC WEB BRIDLE SLINGS

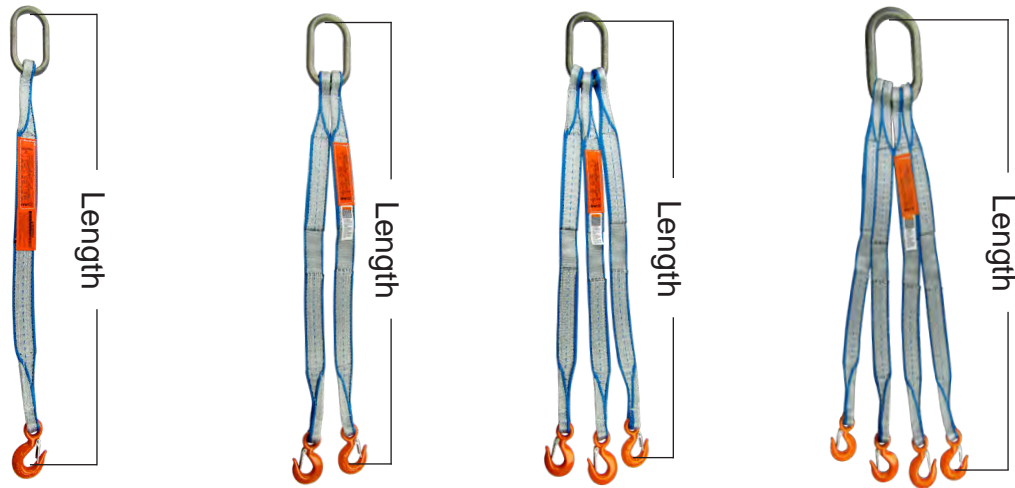

Web Bridle Slings											
Part No. For Web Sling Legs	Web Width (in.)	Web Plies	Number of Legs	Rated Capacity* (lbs.)						Alloy Sling Hook Size (Ton)	Oblong Link Dia. (in.)
				Vertical	Choker	Basket	60°	45°	30°		
EE1801	1	1	Single	1,600	1,280	3,200	—	—	—	1	1/2
	1	1	Double	—	—	—	2,700	2,200	1,600	1	1/2
	1	1	Triple	—	—	—	4,100	3,300	2,400	1	3/4
	1	1	Quad	—	—	—	5,500	4,500	3,200	1	1
EE2801	1	2	Single	3,000	2,400	6,000	—	—	—	1-1/2	1/2
	1	2	Double	—	—	—	5,100	4,200	3,000	1-1/2	1/2
	1	2	Triple	—	—	—	7,700	6,300	4,500	1-1/2	3/4
	1	2	Quad	—	—	—	10,300	8,400	6,000	1-1/2	1
EE1802	2	1	Single	3,000	2,400	6,000	—	—	—	1-1/2	1/2
	2	1	Double	—	—	—	5,100	4,200	3,000	1-1/2	1/2
	2	1	Triple	—	—	—	7,700	6,300	4,500	1-1/2	3/4
	2	1	Quad	—	—	—	10,300	8,400	6,000	1-1/2	1
EE2802	2	2	Single	6,000	4,800	12,000	—	—	—	3	3/4
	2	2	Double	—	—	—	10,300	8,400	6,000	3	1
	2	2	Triple	—	—	—	15,500	12,700	9,000	3	1
	2	2	Quad	—	—	—	20,700	16,900	12,000	3	1-1/4

Note: Hardware capacities correspond to the appropriate sling capacities. See hardware dimensions in Rigging Hardware section in this catalog. Import hooks with latches are standard. Contact *Lift-All* for domestic hook and latch options.

* **WARNING** Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog. **Always protect synthetic slings from being cut by corners and edges. See the Sling Protection section in this catalog.**