


## CHAIN SLING HARDWARE

### Chain Sling Eye Hook – Code S

- For use with both G80 and G100 chain.
- Quenched and tempered alloy steel.
- Fatigue rated.
- 100% proof-tested.
- Durable powder-coated finish.
- Design factor 4:1.



Shown with optional latch.

| Grade | Chain Size (in.) | <sup>1</sup> Rated Cap.* (lbs.) | Part Number     | Dimensions (in.) |       |      |       |      |      |      |      |       |      |      |      |      |       | Wgt. Ea. (lbs.) |
|-------|------------------|---------------------------------|-----------------|------------------|-------|------|-------|------|------|------|------|-------|------|------|------|------|-------|-----------------|
|       |                  |                                 |                 | B                | D     | E    | G     | H    | I    | K    | L    | M     | N    | O    | P    | S    |       |                 |
| 100   | 7/32             | 2,700                           | <b>732DESH</b>  | 1.50             | 3.04  | 1.30 | 5.06  | 0.38 | 0.66 | 1.47 | 0.75 | 3.75  | 0.97 | 0.99 | 0.94 | 0.99 | 0.80  |                 |
| 100   | 9/32             | 4,300                           | <b>932DESH</b>  | 1.65             | 3.48  | 1.50 | 5.25  | 0.45 | 0.75 | 1.75 | 0.72 | 3.75  | 1.19 | 1.21 | 1.05 | 1.10 | 1.10  |                 |
| 100   | 3/8              | 8,800                           | <b>38DESH</b>   | 2.06             | 4.33  | 1.88 | 6.66  | 0.58 | 0.97 | 2.19 | 0.91 | 4.77  | 1.44 | 1.46 | 1.31 | 1.29 | 1.90  |                 |
| 100   | 1/2              | 15,000                          | <b>12DESH</b>   | 2.63             | 5.50  | 2.25 | 8.16  | 0.77 | 1.10 | 2.56 | 1.09 | 5.67  | 1.78 | 1.91 | 1.68 | 1.63 | 4.50  |                 |
| 100   | 5/8              | 22,600                          | <b>58DESH</b>   | 3.06             | 6.23  | 2.63 | 9.63  | 0.89 | 1.46 | 2.62 | 1.31 | 6.50  | 2.03 | 2.20 | 2.23 | 1.69 | 7.30  |                 |
| 100   | 3/4              | 35,300                          | <b>34DESH</b>   | 3.50             | 7.82  | 3.00 | 11.38 | 1.00 | 1.69 | 3.47 | 1.50 | 7.81  | 2.50 | 2.82 | 2.58 | 2.31 | 11.40 |                 |
| 80    | 7/8              | 34,200                          | <b>78G8ESH</b>  | 3.88             | 8.59  | 3.38 | 12.72 | 1.09 | 1.94 | 3.88 | 1.69 | 8.75  | 2.78 | 3.22 | 2.84 | 2.38 | 18.10 |                 |
| 80    | 1                | 47,700                          | <b>1G8ESH</b>   | 4.31             | 9.59  | 4.00 | 14.23 | 1.22 | 2.14 | 4.25 | 1.88 | 9.88  | 3.13 | 3.55 | 3.09 | 2.88 | 22.60 |                 |
| 80    | 1-1/4            | 72,300                          | <b>114G8ESH</b> | 5.31             | 11.56 | 4.66 | 17.00 | 1.50 | 2.62 | 4.64 | 2.31 | 11.50 | 3.88 | 4.25 | 3.89 | 3.41 | 47.00 |                 |


<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

**Latches are not included on domestic hooks. If latches are required, you must specify when ordering.**

| Part Number | 732DESH | 932DESH | 38DESH | 12DESH | 58DESH | 34DESH | 78G8ESH | 1G8ESH | 114G8ESH |
|-------------|---------|---------|--------|--------|--------|--------|---------|--------|----------|
| Latch Kit   | 732LK   | 932LK   | 38LK   | 12LK   | 58LK   | 34LK   | 78LK    | 1LK    | 114LK    |

### Foundry Hook – Code F

- For use with both G80 and G100 chain.
- Throat opening to 6".
- Quenched and tempered alloy steel.
- 100% proof-tested.
- Fatigue rated.
- Durable powder-coated finish.
- Design factor 4:1.



| Grade | Chain Size (in.) | <sup>1</sup> Rated Cap.* (lbs.) | Part Number     | Dimensions (in.) |       |      |       |      |      |      |      |       |      |      |      | Wgt. Ea. (lbs.) |
|-------|------------------|---------------------------------|-----------------|------------------|-------|------|-------|------|------|------|------|-------|------|------|------|-----------------|
|       |                  |                                 |                 | B                | D     | E    | G     | H    | I    | K    | L    | M     | N    | O    | R    |                 |
| 100   | 9/32             | 4,300                           | <b>932DEFH</b>  | 1.56             | 4.73  | 2.50 | 6.45  | 0.47 | 1.00 | 1.56 | 0.63 | 4.75  | 2.50 | 1.23 | 0.25 | 2.4             |
| 100   | 3/8              | 8,800                           | <b>38DEFH</b>   | 2.00             | 5.72  | 3.00 | 7.88  | 0.63 | 1.27 | 1.88 | 0.80 | 5.77  | 3.00 | 1.50 | 0.31 | 4.5             |
| 100   | 1/2              | 15,000                          | <b>12DEFH</b>   | 2.50             | 6.74  | 3.50 | 9.38  | 0.75 | 1.50 | 2.22 | 1.00 | 6.88  | 3.50 | 1.75 | 0.38 | 7.1             |
| 100   | 5/8              | 22,600                          | <b>58DEFH</b>   | 3.00             | 7.79  | 4.00 | 10.97 | 0.88 | 1.81 | 2.63 | 1.13 | 8.06  | 4.00 | 2.03 | 0.44 | 11.6            |
| 100   | 3/4              | 35,300                          | <b>34DEFH</b>   | 3.50             | 9.07  | 4.50 | 12.81 | 1.00 | 2.20 | 3.00 | 1.50 | 9.25  | 4.50 | 2.56 | 0.50 | 20              |
| 80    | 7/8              | 34,200                          | <b>78G8EFH</b>  | 4.00             | 10.09 | 5.00 | 14.23 | 1.13 | 2.25 | 3.38 | 1.70 | 10.38 | 5.00 | 2.78 | 0.56 | 26              |
| 80    | 1                | 47,700                          | <b>1G8EFH</b>   | 4.50             | 11.55 | 5.50 | 16.17 | 1.29 | 2.63 | 3.75 | 2.13 | 11.56 | 5.50 | 3.45 | 0.62 | 36.8            |
| 80    | 1-1/4            | 72,300                          | <b>114G8EFH</b> | 5.13             | 12.87 | 6.00 | 18.03 | 1.38 | 3.17 | 4.25 | 2.33 | 12.88 | 6.00 | 3.81 | 0.75 | 58.4            |


<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

**\* WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Do not use slings at angles of less than 30°. Refer to the Effect of Angle chart found in the General Information section of this catalog.

## CHAIN SLING HARDWARE

### Eye Cradle Grab Hook – Code G

- For use with both G80 and G100 chain.
- Unique cradle grab design.
- Quenched and tempered alloy steel.
- 100% proof-tested.
- Fatigue rated.
- Durable powder-coated finish.
- Design factor 4:1.




| Grade | Chain Size (in.) | <sup>1</sup> Rated Cap.* (lbs.) | Part Number      | Dimensions (in.) |      |      |       |      |      |      |      |       |      | Wgt. Ea. (lbs.) |
|-------|------------------|---------------------------------|------------------|------------------|------|------|-------|------|------|------|------|-------|------|-----------------|
|       |                  |                                 |                  | B                | D    | E    | G     | H    | I    | K    | L    | M     | P    |                 |
| 100   | 7/32             | 2,700                           | <b>732DECGH</b>  | 1.20             | 1.68 | 0.33 | 3.22  | 0.33 | 0.92 | 0.99 | 0.55 | 2.20  | 0.69 | 0.35            |
| 100   | 9/32             | 4,300                           | <b>932DECGH</b>  | 1.40             | 1.93 | 0.39 | 3.72  | 0.39 | 1.07 | 1.07 | 0.63 | 2.58  | 0.76 | 0.55            |
| 100   | 3/8              | 8,800                           | <b>38DECGH</b>   | 1.78             | 2.86 | 0.52 | 0.48  | 0.52 | 1.38 | 1.38 | 0.75 | 3.27  | 1.02 | 1.39            |
| 100   | 1/2              | 15,000                          | <b>12DECGH</b>   | 2.28             | 3.69 | 0.63 | 6.36  | 0.63 | 1.81 | 1.81 | 1.06 | 4.23  | 1.53 | 3.05            |
| 100   | 5/8              | 22,600                          | <b>58DECGH</b>   | 2.75             | 4.53 | 0.75 | 7.62  | 0.75 | 2.13 | 2.13 | 1.25 | 5.06  | 1.80 | 4.36            |
| 100   | 3/4              | 35,300                          | <b>34DECGH</b>   | 3.50             | 5.23 | 0.91 | 9.54  | 1.00 | 2.88 | 2.88 | 1.52 | 6.70  | 1.85 | 9               |
| 80    | 7/8              | 34,200                          | <b>78G8ECGH</b>  | 3.75             | 5.69 | 1.00 | 9.63  | 1.00 | 3.00 | 3.75 | 1.75 | 6.50  | 2.12 | 10.4            |
| 80    | 1                | 47,700                          | <b>1G8ECGH</b>   | 4.31             | 7.00 | 1.19 | 12.44 | 1.22 | 3.88 | 4.31 | 1.88 | 8.09  | 3.12 | 20.9            |
| 80    | 1-1/4            | 72,300                          | <b>114GE8CGH</b> | 5.38             | 8.50 | 1.50 | 15.56 | 1.56 | 2.50 | 5.50 | 2.25 | 10.50 | 3.50 | 40              |

~ 1-1/4" is a Non-Cradle type. Also, Non-Cradle Grab Hooks are available for other sizes upon request.

<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

### Clevis Cradle Grab Hook – Code G

- For use with both G80 and G100 chain.
- Unique cradle grab design.
- 100% proof-tested.
- Quenched and tempered alloy steel.
- Fatigue rated.
- Durable powder-coated finish.
- Replacement pin available.
- Design factor 4:1.



| Chain Size (in.) | <sup>1</sup> Rated Capacity* (lbs.) | Part Number    | Dimensions (in.) |      |      |      |      |      |      |      |      | Weight Each (lbs.) |
|------------------|-------------------------------------|----------------|------------------|------|------|------|------|------|------|------|------|--------------------|
|                  |                                     |                | D                | G    | H    | J    | K    | L    | M    | P    | R    |                    |
| 9/32             | 4,300                               | <b>932DCGH</b> | 2.18             | 3.39 | 0.38 | 0.82 | 0.97 | 0.36 | 0.38 | 0.82 | 1.86 | 0.63               |
| 3/8              | 8,800                               | <b>38DCGH</b>  | 2.72             | 4.33 | 0.47 | 1.18 | 1.29 | 0.51 | 0.47 | 1.03 | 2.47 | 1.30               |
| 1/2              | 15,000                              | <b>12DCGH</b>  | 3.65             | 5.27 | 0.65 | 1.39 | 2.01 | 0.63 | 0.60 | 1.19 | 3.04 | 2.10               |
| 5/8              | 22,000                              | <b>58DCGH</b>  | 4.50             | 6.54 | 0.77 | 1.55 | 2.42 | 0.75 | 0.77 | 1.41 | 3.76 | 4.20               |
| 3/4              | 35,300                              | <b>34DCGH</b>  | 5.40             | 8.80 | 0.88 | 2.05 | 2.69 | 0.88 | 0.91 | 1.89 | 5.30 | 10.50              |


<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

\* **WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Do not use slings at angles of less than 30°. Refer to the Effect of Angle chart found in the General Information section of this catalog.

## CHAIN SLING HARDWARE

### Clevis Sling Hook – Code S

- For use with both G80 and G100 chain.
- Unique cradle grab design.
- 100% proof-tested.
- Quenched and tempered alloy steel.
- Fatigue rated.
- Durable powder-coated finish.
- Replacement pin available.
- Design factor 4:1.

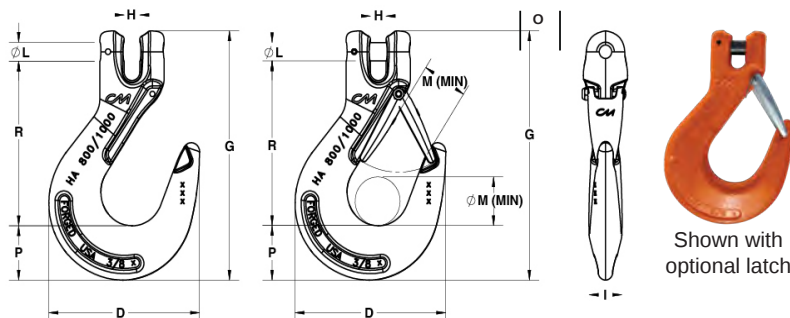

| Chain Size (in.) | <sup>1</sup> Rated Capacity* (lbs.) | Part Number    | Dimensions (in.) |       |      |      |      |      |      |      |      | Weight Each (lbs.) |
|------------------|-------------------------------------|----------------|------------------|-------|------|------|------|------|------|------|------|--------------------|
|                  |                                     |                | D                | G     | H    | I    | L    | M    | O    | P    | R    |                    |
| 9/32             | 4,300                               | <b>932DCSH</b> | 3.53             | 5.55  | 0.38 | 0.75 | 0.36 | 0.83 | 1.32 | 1.11 | 3.75 | 1.20               |
| 3/8              | 8,800                               | <b>38DCSH</b>  | 4.54             | 6.93  | 0.47 | 1.00 | 0.51 | 1.06 | 1.34 | 1.51 | 4.58 | 2.21               |
| 1/2              | 15,000                              | <b>12DCSH</b>  | 5.48             | 8.28  | 0.58 | 1.33 | 0.63 | 1.38 | 1.87 | 1.55 | 5.59 | 4.22               |
| 5/8              | 22,600                              | <b>58DCSH</b>  | 6.20             | 9.61  | 0.71 | 1.47 | 0.75 | 1.69 | 2.11 | 1.83 | 6.44 | 6.64               |
| 3/4              | 35,300                              | <b>34DCSH</b>  | 7.63             | 11.79 | 1.88 | 1.88 | 0.94 | 2.09 | 2.55 | 2.51 | 7.74 | 11.22              |


<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

| Part Number | <b>932DCSH</b> | <b>38DCSH</b> | <b>12DCSH</b> | <b>58DCSH</b> | <b>34DCSH</b> |
|-------------|----------------|---------------|---------------|---------------|---------------|
| Latch Kit   | 932LKCE        | 38LKCE        | 12LKCE        | 58LKCE        | 34LKCE        |

Latches are not included on domestic hooks. If latches are required, you must specify when ordering.

### Plate Hooks – G80

- Made with alloy steel.
- May be used for mechanical and welded sling assemblies.
- Design factor 4:1.
- Ratings are per hook.
- Do not use at angle other than 60° from horizontal.

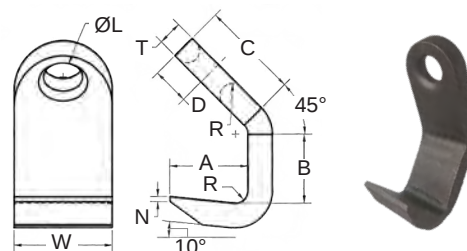

**Note: Never use plate hooks on a quad sling. Do not attempt to lift using only one plate hook.**

| Chain Size (in.) | <sup>1</sup> Rated Capacity* (lbs.) | Part Number    | Dimensions (in.) |      |      |      |      |      |      |      |      | Weight Each (lbs.) |
|------------------|-------------------------------------|----------------|------------------|------|------|------|------|------|------|------|------|--------------------|
|                  |                                     |                | A                | B    | C    | D    | L    | N    | R    | T    | W    |                    |
| 9/32             | 4,200                               | <b>932G8PH</b> | 2.00             | 1.75 | 2.50 | 0.93 | 1.00 | 0.12 | 0.31 | 0.63 | 2.50 | 2.80               |
| 3/8              | 7,400                               | <b>38G8PH</b>  | 2.63             | 3.00 | 4.31 | 1.18 | 1.12 | 0.18 | 0.38 | 0.75 | 2.75 | 5.70               |
| 1/2              | 13,000                              | <b>12G8PH</b>  | 3.50             | 4.00 | 4.38 | 1.50 | 1.50 | 0.25 | 0.50 | 1.00 | 3.50 | 13.0               |
| 5/8              | 20,400                              | <b>58G8PH</b>  | 4.38             | 5.00 | 4.43 | 1.87 | 1.88 | 0.31 | 0.63 | 1.25 | 5.00 | 26.5               |
| 3/4              | 30,000                              | <b>34G8PH</b>  | 5.19             | 6.00 | 6.50 | 2.38 | 2.25 | 0.38 | 0.75 | 1.50 | 5.75 | 42.0               |
| 7/8              | 40,000                              | <b>78G8PH</b>  | 6.00             | 7.00 | 7.63 | 2.50 | 2.63 | 0.47 | 1.00 | 1.75 | 6.00 | 65.0               |


<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

**\* WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Do not use slings at angles of less than 30°. Refer to the Effect of Angle chart found in the General Information section of this catalog.

## CHAIN SLING HARDWARE

### Mechanical Coupling Links

- Used for overhead lifting slings to connect chain branches to the master link and to the hook attachments.
- Constructed of drop-forged alloy steel.
- Can be used with G80 and G100 chain.
- Must be matched to chain size.
- Do not use for chain repair or splicing.
- Meets ASTM A952 standards.
- Design factor 4:1.



| Grade | Chain Size (in.) | <sup>1</sup> Rated Capacity* (lbs.) | Part Number    | Dimensions (in.) |      |      |      |      |      |      | Weight Each (lbs.) |
|-------|------------------|-------------------------------------|----------------|------------------|------|------|------|------|------|------|--------------------|
|       |                  |                                     |                | A                | B    | C    | D    | E    | F    | G    |                    |
| 100   | 7/32             | 2,700                               | <b>732G10H</b> | 0.29             | 0.28 | 1.85 | 0.69 | 0.61 | 1.44 | 0.52 | 0.27               |
| 100   | 9/32             | 4,300                               | <b>932G10H</b> | 0.37             | 0.44 | 1.94 | 0.69 | 0.68 | 1.58 | 0.61 | 0.28               |
| 100   | 3/8              | 8,800                               | <b>38G10H</b>  | 0.52             | 0.50 | 3.02 | 1.15 | 1.05 | 2.33 | 0.81 | 0.84               |
| 100   | 1/2              | 15,000                              | <b>12G10H</b>  | 0.64             | 0.68 | 3.79 | 1.43 | 1.29 | 2.98 | 1.10 | 1.87               |
| 100   | 5/8              | 22,600                              | <b>58G10H</b>  | 0.81             | 0.91 | 4.50 | 1.70 | 1.54 | 3.57 | 1.32 | 3.13               |
| 100   | 3/4              | 35,200                              | <b>34G10H</b>  | 0.97             | 1.07 | 5.36 | 2.06 | 1.78 | 4.69 | 1.52 | 5.75               |
| 80    | 7/8              | 34,200                              | <b>78G8H</b>   | 1.16             | 1.05 | 5.25 | 1.97 | 2.09 | 4.95 | 1.88 | 5.98               |
| 80    | 1                | 47,700                              | <b>1G8H</b>    | 1.32             | 1.25 | 6.00 | 2.31 | 2.37 | 5.87 | 2.33 | 9.47               |
| 80    | 1-1/4            | 72,300                              | <b>114G8H</b>  | 1.57             | 1.53 | 6.81 | 2.17 | 2.98 | 7.04 | 2.67 | 16.61              |


<sup>1</sup> Rated Capacity also referred to as Working Load Limit.

### S-Hooks – G80

- Made from heat treated alloy steel.
- 100% proof-tested.
- Durable powder-coated finish.
- Working Load Limit is embossed on hooks.
- Design factor 4:1.

| Stock Dia. (in.) | <sup>1</sup> Rated Capacity* (lbs.) | Part Number     | Dimensions (in.) |       |      |      | Weight Each (lbs.) |
|------------------|-------------------------------------|-----------------|------------------|-------|------|------|--------------------|
|                  |                                     |                 | A                | B     | C    | D    |                    |
| 9/32             | 210                                 | <b>932G8SH</b>  | 0.28             | 4.50  | 1.13 | 1.13 | 0.15               |
| 3/8              | 410                                 | <b>38G8SH</b>   | 0.38             | 6.00  | 1.50 | 1.50 | 0.35               |
| 1/2              | 870                                 | <b>12G8SH</b>   | 0.56             | 7.50  | 2.00 | 2.00 | 1.04               |
| 5/8              | 1,120                               | <b>58G8SH</b>   | 0.63             | 9.00  | 2.50 | 2.50 | 1.56               |
| 3/4              | 1,730                               | <b>34G8SH</b>   | 0.75             | 10.50 | 3.00 | 3.00 | 2.60               |
| 7/8              | 2,370                               | <b>78G8SH</b>   | 0.88             | 12.00 | 3.50 | 3.50 | 4.20               |
| 1                | 2,920                               | <b>1G8SH</b>    | 1.00             | 13.00 | 4.00 | 4.00 | 6.00               |
| 1-5/32           | 3,150                               | <b>1532G8SH</b> | 1.13             | 15.00 | 4.50 | 4.50 | 9.30               |
| 1-1/4            | 4,450                               | <b>114G8SH</b>  | 1.25             | 16.00 | 5.00 | 5.00 | 11.70              |
| 1-3/8            | 6,100                               | <b>138G8SH</b>  | 1.38             | 17.00 | 5.50 | 5.50 | 15.40              |
| 1-1/2            | 6,250                               | <b>112G8SH</b>  | 1.50             | 18.00 | 6.00 | 6.00 | 19.50              |

<sup>1</sup> Rated Capacity also referred to as Working Load Limit.



\* **WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Do not use slings at angles of less than 30°. Refer to the Effect of Angle chart found in the General Information section of this catalog.