


CONTAINER SLING

Lift-All's Container Sling combines the patented technology of *Edge Defender Flex Plus* and the high capacity, ultra lightweight *DynaFlex* making container recovery safe and easy. The cut protection pad covers the roundsling body creating two eyes for easy attachment to the crane hook.



Features and Benefits

- Designed specifically to fit into tight connection points on the container while maintaining a high capacity.
- Comes with a unique cut protection pad to assist in protecting the sling from edges yet remains flexible enough to move through tight spaces.
- Ensure the white *Dyneema* section of the pad is outward facing to get the most protection at the main point of contact.
- Easily shift bearing points for longer sling life.
- The open design of the pad allows for easy sling inspection before and after each use.

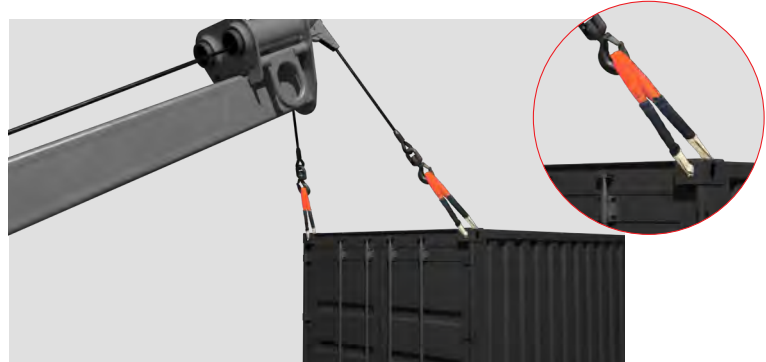

Insert the Container Sling through the connection point on the container. Ensure equal parts of the white *Dyneema* pad are on either side of the connection point.

Part Number	Basket Capacity (lbs.)	Cut Protection Pad Width (in.)
TSCONREC20X5	20,000	8"
TSCONREC30X5	30,000	8"
TSCONREC40X5	40,000	10"

Note: Standard length is 5 feet.

TUFLEX® VEHICLE RECOVERY STRAPS

Part Number	Ultimate Breaking Strength* (lbs.)	Towing Capacity ¹ (lbs.)
TSEN90X20	42,000	14,000
TSEN90X30		
TSEN120X20	52,500	17,500
TSEN120X30		
TSEN150X20	66,000	22,000
TSEN150X30		
TSEN180X20	84,000	28,000
TSEN180X30		
TSEN240X20	105,900	35,300
TSEN240X30		
TSEN360X20	154,800	51,600
TSEN360X30		
TSEN600X20	264,900	88,300
TSEN600X30		
TSEN800X20	330,000	110,000
TSEN800X30		
TSEN1000X20	450,000	150,000
TSEN1000X30		

* Ultimate breaking strength when new. ¹ Do not exceed towing capacity.

THE HEAVY DUTY RECOVERY STRAPS!

Tuflex straps elongate to 3% and are designed to prevent dangerous recoil.

We start with a standard *Tuflex* Roundsling:

- 1 Add a jacket of texturized, abrasion resistant nylon over the body, creating an eye/eye style.
- 2 The 18" long eyes are then covered with ballistic nylon material for additional protection.
- 3 An 18" long sliding sleeve wear pad is added to protect against load edges.



Ratings in the table reflect a 3:1 design factor. To use product for lifting applications with a 5:1 design factor, contact *Lift-All* when ordering.

Inspection Criteria for all Vehicle Recovery Straps. Refer to photographs of damaged web and roundslings in this catalog.