


## ENDLESS WIRE ROPE SLINGS

Made from one 6X19 or 6X37 EIPS IWRC wire rope, mechanically joined with steel sleeves. *Lift-All* Endless Wire Rope Slings achieve higher capacities at a lower cost.

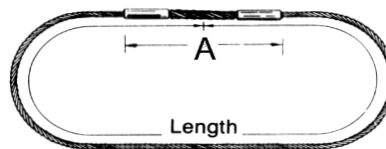

Order length by circumference

### Features and Benefits

Maintains all the basic *Lift-All* wire rope sling features plus...

#### Promotes Safety

- Load stability and balance can be achieved by spreading sling legs in a basket or choker hitch.

#### Saves Money

- Wear points can be shifted to extend sling life.
- The most versatile style of sling - fewer slings to inventory.

#### Saves Time

- More flexible than eye slings of comparable strength.
- Ideal for turning loads.

*Lift-All* Endless Wire Rope Slings are also available in *E-Z Flex™*. Contact *Lift-All* for capacities and ordering details.

**WARNING** Do not lift with hook in splice area as sling damage may occur.

### Endless – Mechanical Splice

Rope Dia. (in.)	Rated Capacity* (tons)			Min. Sling Length (ft.)	Splice Length A (in.)
	Vertical	Choker	Basket		
1/4	1.0	0.71	2.0	3	8
5/16	1.6	1.1	3.1	3	8
3/8	2.3	1.6	4.5	3	8
7/16	3.1	2.1	6.1	6	10
1/2	3.9	2.8	7.9	6	10
9/16	5.0	3.5	10	6	10
5/8	6.1	4.3	12	6	10
3/4	8.8	6.2	18	8	16
7/8	12	8.3	24	8	18
1	15	11	31	8	20

Three sleeves used on 3/4" diameter and larger.  
Vertical and basket ratings are based on a minimum D/d of 5.

## HIDDEN TUCK HAND SPLICED SLINGS

### Features and Benefits

Maintains all the basic *Lift-All* wire rope sling features plus...


#### Promotes Safety

- Hidden tuck buries wire ends to avoid snags and injuries.

#### Saves Time

- No steel sleeves to catch under load.

**Note:** Contact Customer Service for pricing and availability.



### Hidden Tuck Hand Spliced Slings

Rope Dia. (in.)	Rated Capacity* (tons)			Min. Sling Length	Eye Size W X L (in.)
	Vertical	Choker	Basket		
1/4	0.54	0.42	1.1	2'-0"	3 X 6
5/16	0.83	0.66	1.7	2'-3"	3 X 6
3/8	1.2	0.94	2.4	2'-6"	3 X 6
7/16	1.6	1.3	3.2	2'-9"	3.5 X 7
1/2	2.0	1.6	4.0	3'-0"	4 X 8
9/16	2.5	2.1	5.0	3'-6"	4.5 X 9
5/8	3.1	2.6	6.2	4'-0"	5 X 10
3/4	4.3	3.7	8.6	4'-6"	6 X 12
7/8	5.7	5.0	11	5'-6"	7 X 14
1	7.4	6.4	15	6'-0"	8 X 16

Basket ratings are based on a minimum D/d of 15.

**WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog.