


TELESCOPING FORKLIFT BOOMS (TFLB)

Features and Benefits

- Telescoping boom for versatility.
- T-Pin locks boom into position.
- Handle on end for easy extension of boom.
- Swivel hooks with latch standard.
- Restraining chain with grab hook standard.
- 12 feet maximum horizontal reach.

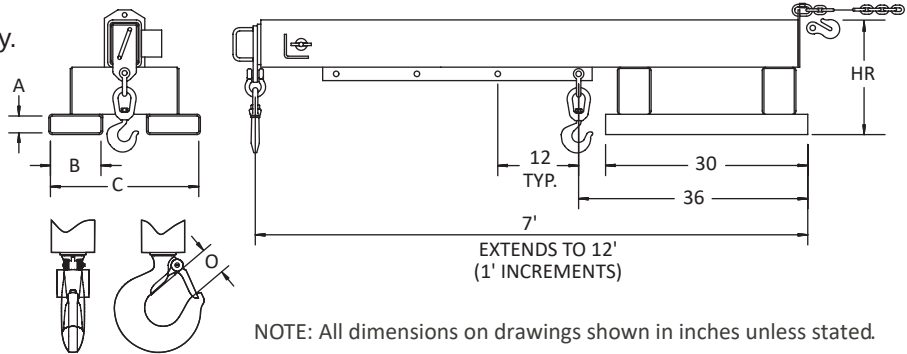


Part Number	Dimensions (in.)					Maximum Capacity at Hook Position (lbs.)							Wgt. (lbs.)
	HR	A	B	C	O Hook Opening	3' - 6'	7'	8'	9'	10'	11'	12'	
TFLB30	6.60	2.50	7.50	22	1.00	3,000	3,000	2,600	2,200	1,900	1,600	1,500	350
TFLB40	6.75				1.09	4,000	3,200	2,600	2,200	1,900	1,600	1,500	350
TFLB60	7.02				1.36	6,000	5,000	4,200	3,500	3,000	2,700	2,500	400
TFLB80	7.27				1.61	8,000	7,000	5,700	4,800	4,100	3,600	3,100	535

PIVOTING FORKLIFT BOOMS (PFLB)

Features and Benefits

- Telescoping boom for versatility.
- T-Pin locks boom into position.
- Handle on end for easy extension of boom.
- Swivel hooks with latch are standard.
- Restraining chain with grab hook standard reach.
- Vertical pivoting boom to 6' 4" height.
- Vertical adjustability in five increments up to a maximum of 40°.

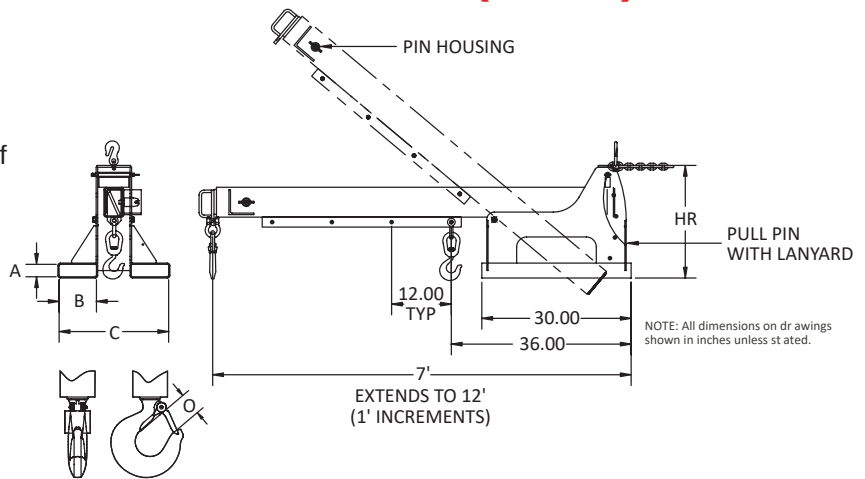

Part Number	Dimensions (in.)					Maximum Capacity at Hook Position (lbs.)							Wgt. (lbs.)
	A	B	C	HR	O Hook Opening	3'- 6'	7'	8'	9'	10'	11'	12'	
PFLB30	2.50	7.50	22	22.63	1.00	3,000	3,000	2,600	2,200	1,900	1,600	1,500	350
PFLB40					1.09	4,000	3,200	2,600	2,200	1,900	1,600	1,500	350
PFLB60	2.50	7.50	22	22.63	1.36	6,000	5,000	4,200	3,500	3,000	2,700	2,500	420
PFLB80					1.61	8,000	7,000	5,700	4,800	4,100	3,600	3,100	540