


FIXED HEIGHT STEEL (H90)

Features and Benefits

- Balanced design allows for easy rolling, even under load.
- Simple bolt together construction.
- Includes four steel swivel casters.
- Easy set-up and maintenance.
- Adjustable span from 10' to 16'.

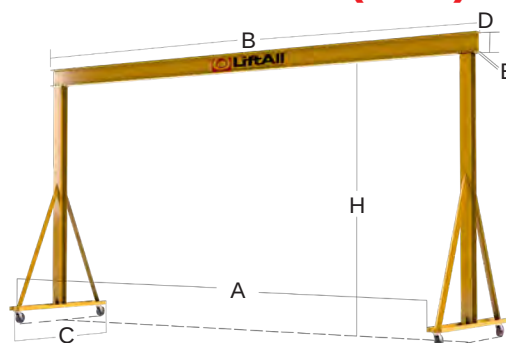

Dimensions

- A:** Inside Span
B: Overall Length
C: Support Width
D: Beam Height
E: Flange Width

Part Number	Rated Cap.	H (ft.)	Nominal Span (ft.)	Dimensions (in.)					Caster Dia. (in.)	Weight (lbs.)
				A	B	C	D	E		
511-2000-10-10	1-Ton	10	10	10'-4"	11'-6"	5'-6"	8	5.25	6	825
511-2000-12-10			12	12'-4"	13'-6"	5'-6"	8	5.25	6	930
511-2000-14-10			14	14'-4"	15'-6"	5'-6"	8	5.25	6	967
511-2000-16-10			16	16'-4"	17'-6"	5'-6"	8	5.25	6	1136
511-2000-10-12		12	10	10'-4"	11'-6"	6'-6"	8	5.25	6	913
511-2000-12-12			12	12'-4"	13'-6"	6'-6"	8	5.25	6	1018
511-2000-14-12			14	14'-4"	15'-6"	6'-6"	8	5.25	6	1055
511-2000-16-12			16	16'-4"	17'-6"	6'-6"	8	5.25	6	1224
511-2000-10-14		14	10	10'-4"	11'-6"	7'-6"	8	5.25	6	977
511-2000-12-14			12	12'-4"	13'-6"	7'-6"	8	5.25	6	1082
511-2000-14-14			14	14'-4"	15'-6"	7'-6"	8	5.25	6	1119
511-2000-16-14			16	16'-4"	17'-6"	7'-6"	8	5.25	6	1288
511-2000-10-16		16	10	10'-4"	11'-6"	7'-6"	8	5.25	6	1081
511-2000-12-16			12	12'-4"	13'-6"	7'-6"	8	5.25	6	1186
511-2000-14-16			14	14'-4"	15'-6"	7'-6"	8	5.25	6	1223
511-2000-16-16			16	16'-4"	17'-6"	7'-6"	8	5.25	6	1392
511-4000-10-10	2-Ton	10	10	10'-4"	11'-6"	5'-6"	8	5.25	8	949
511-4000-12-10			12	12'-4"	13'-6"	5'-6"	8	5.25	8	986
511-4000-14-10			14	14'-4"	15'-6"	5'-6"	10	5.75	8	1131
511-4000-16-10			16	16'-4"	17'-6"	5'-6"	10	5.75	8	1182
511-4000-10-12		12	10	10'-4"	11'-6"	6'-6"	8	5.25	8	1041
511-4000-12-12			12	12'-4"	13'-6"	6'-6"	8	5.25	8	1078
511-4000-14-12			14	14'-4"	15'-6"	6'-6"	10	5.75	8	1223
511-4000-16-12			16	16'-4"	17'-6"	6'-6"	10	5.75	8	1274
511-4000-10-14		14	10	10'-4"	11'-6"	7'-6"	8	5.25	8	1101
511-4000-12-14			12	12'-4"	13'-6"	7'-6"	8	5.25	8	1138
511-4000-14-14			14	14'-4"	15'-6"	7'-6"	10	5.75	8	1283
511-4000-16-14			16	16'-4"	17'-6"	7'-6"	10	5.75	8	1334
511-4000-10-16		16	10	10'-4"	11'-6"	7'-6"	8	5.25	8	1205
511-4000-12-16			12	12'-4"	13'-6"	7'-6"	8	5.25	8	1242
511-4000-14-16			14	14'-4"	15'-6"	7'-6"	10	5.75	8	1387
511-4000-16-16			16	16'-4"	17'-6"	7'-6"	10	5.75	8	1438
511-6000-10-10	3-Ton	10	10	9'-3"	11'-6"	5'-6"	10	6.50	8	1107
511-6000-12-10			12	11'-3"	13'-6"	5'-6"	10	6.50	8	1157
511-6000-14-10			14	13'-3"	15'-6"	5'-6"	10	6.50	8	1208
511-6000-16-10			16	15'-3"	17'-6"	5'-6"	12	6.50	8	1427

FIXED HEIGHT STEEL (H90)

(continued)

Part Number	Rated Cap.	H (ft.)	Nominal Span (ft.)	Dimensions (in.)					Caster Dia. (in.)	Weight (lbs.)
				A	B	C	D	E		
511-6000-10-12	3-Ton	12	10	9'-3"	11'-6"	6'-6"	10	6.50	8	1229
511-6000-12-12			12	11'-3"	13'-6"	6'-6"	10	6.50	8	1279
511-6000-14-12			14	13'-3"	15'-6"	6'-6"	10	6.50	8	1330
511-6000-16-12			16	15'-3"	17'-6"	6'-6"	12	6.50	8	1529
511-6000-10-14		14	10	9'-3"	11'-6"	7'-6"	10	6.50	8	1350
511-6000-12-14			12	11'-3"	13'-6"	7'-6"	10	6.50	8	1400
511-6000-14-14			14	13'-3"	15'-6"	7'-6"	10	6.50	8	1451
511-6000-16-14			16	15'-3"	17'-6"	7'-6"	12	6.50	8	1670
511-6000-10-16		16	10	9'-3"	11'-6"	7'-6"	10	6.50	8	1473
511-6000-12-16			12	11'-3"	13'-6"	7'-6"	10	6.50	8	1523
511-6000-14-16			14	13'-3"	15'-6"	7'-6"	10	6.50	8	1574
511-6000-16-16			16	15'-3"	17'-6"	7'-6"	12	6.50	8	1793
511-8000-10-10	4-Ton	10	10	9'-3"	11'-6"	5'-6"	16	7.00	8	1217
511-8000-12-10			12	11'-3"	13'-6"	5'-6"	16	7.00	8	1877
511-8000-14-10			14	13'-3"	15'-6"	5'-6"	18	7.50	8	1357
511-8000-16-10			16	15'-3"	17'-6"	5'-6"	18	7.50	8	1812
511-8000-10-12		12	10	9'-3"	11'-6"	6'-6"	16	7.00	8	1339
511-8000-12-12			12	11'-3"	13'-6"	6'-6"	16	7.00	8	1409
511-8000-14-12			14	13'-3"	15'-6"	6'-6"	18	7.50	8	1479
511-8000-16-12			16	15'-3"	17'-6"	6'-6"	18	7.50	8	1934
511-8000-10-14		14	10	9'-3"	11'-6"	7'-6"	16	7.00	8	1460
511-8000-12-14			12	11'-3"	13'-6"	7'-6"	16	7.00	8	1530
511-8000-14-14			14	13'-3"	15'-6"	7'-6"	18	7.50	8	1600
511-8000-16-14			16	15'-3"	17'-6"	7'-6"	18	7.50	8	2055
511-8000-10-16		16	10	9'-3"	11'-6"	7'-6"	16	7.00	8	1583
511-8000-12-16			12	11'-3"	13'-6"	7'-6"	16	7.00	8	1653
511-8000-14-16			14	13'-3"	15'-6"	7'-6"	18	7.50	8	1723
511-8000-16-16			16	15'-3"	17'-6"	7'-6"	18	7.50	8	2178
511-10000-10-10	5-Ton	10	10	9'-3"	11'-6"	5'-6"	16	7.00	8	1397
511-10000-12-10			12	11'-3"	13'-6"	5'-6"	16	7.00	8	1467
511-10000-14-10			14	13'-3"	15'-6"	5'-6"	18	7.50	8	1537
511-10000-16-10			16	15'-3"	17'-6"	5'-6"	18	7.50	8	1992
511-10000-10-12		12	10	9'-3"	11'-6"	6'-6"	16	7.00	8	1519
511-10000-12-12			12	11'-3"	13'-6"	6'-6"	16	7.00	8	1589
511-10000-14-12			14	13'-3"	15'-6"	6'-6"	18	7.50	8	1659
511-10000-16-12			16	15'-3"	17'-6"	6'-6"	18	7.50	8	2114
511-10000-10-14		14	10	9'-3"	11'-6"	7'-6"	16	7.00	8	1640
511-10000-12-14			12	11'-3"	13'-6"	7'-6"	16	7.00	8	1710
511-10000-14-14			14	13'-3"	15'-6"	7'-6"	18	7.50	8	1780
511-10000-16-14			16	15'-3"	17'-6"	7'-6"	18	7.50	8	2235
511-10000-10-16		16	10	9'-3"	11'-6"	7'-6"	16	7.00	8	1763
511-10000-12-16			12	11'-3"	13'-6"	7'-6"	16	7.00	8	1833
511-10000-14-16			14	13'-3"	15'-6"	7'-6"	18	7.50	8	1903
511-10000-16-16			16	15'-3"	17'-6"	7'-6"	18	7.50	8	2358

General Information

Web Slings

Round Slings

Sling Protection

Wire Rope

Chain Slings

Rigging Hardware

Mesh Slings

Cargo Control

Lift-All Hoists

Hoist Rings


Plate Clamps

Lifting Devices

ADJUSTABLE HEIGHT STEEL (K90)

Features and Benefits

- Balanced design allows for easy rolling, even under load.
- Simple bolt together construction.
- Includes four steel swivel casters.
- Maximum height can be reduced in one foot increments.
- Adjustable span standard.

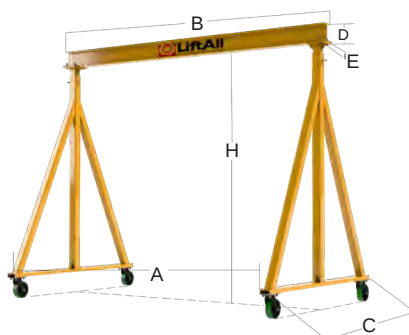

Dimensions

A: Inside Span

B: Overall Length

C: Support Width

D: Beam Height

E: Flange Width

Part Number	Rated Cap.	Nominal Span (ft.)	Dimensions (in.)					H (ft.)		Caster Dia. (in.)	Weight (lbs.)
			A	B	C	D	E	Min.	Max.		
512-2000-10-10	1-Ton	10	10'-5"	11'-6"	5'-6"	8	5.25	7	10	6	650
512-2000-12-10		12	12'-5"	13'-6"	5'-6"	8	5.25			6	750
512-2000-14-10		14	14'-5"	15'-6"	5'-6"	8	5.25			6	800
512-2000-16-10		16	16'-5"	17'-6"	5'-6"	8	5.25			6	950
512-2000-10-12		10	10'-5"	11'-6"	6'-6"	8	5.25	8	12	6	750
512-2000-12-12		12	12'-5"	13'-6"	6'-6"	8	5.25			6	850
512-2000-14-12		14	14'-5"	15'-6"	6'-6"	8	5.25			6	900
512-2000-16-12		16	16'-5"	17'-6"	6'-6"	8	5.25			6	1050
512-2000-10-14		10	10'-5"	11'-6"	7'-6"	8	5.25	10	14	6	800
512-2000-12-14		12	12'-5"	13'-6"	7'-6"	8	5.25			6	900
512-2000-14-14		14	14'-5"	15'-6"	7'-6"	8	5.25			6	950
512-2000-16-14		16	16'-5"	17'-6"	7'-6"	8	5.25			6	1100
512-2000-10-16		10	10'-5"	11'-6"	7'-6"	8	5.25	12	16	6	850
512-2000-12-16		12	12'-5"	13'-6"	7'-6"	8	5.25			6	950
512-2000-14-16		14	14'-5"	15'-6"	7'-6"	8	5.25			6	1000
512-2000-16-16		16	16'-5"	17'-6"	7'-6"	8	5.25			6	1150
512-4000-10-10	2-Ton	10	10'-5"	11'-6"	5'-6"	8	5.25	7	10	8	775
512-4000-12-10		12	12'-5"	13'-6"	5'-6"	8	5.25			8	825
512-4000-14-10		14	14'-5"	15'-6"	5'-6"	10	5.75			8	975
512-4000-16-10		16	16'-5"	17'-6"	5'-6"	10	5.75			8	1025
512-4000-10-12		10	10'-5"	11'-6"	6'-6"	8	5.25	8	12	8	875
512-4000-12-12		12	12'-5"	13'-6"	6'-6"	8	5.25			8	900
512-4000-14-12		14	14'-5"	15'-6"	6'-6"	10	5.75			8	1050
512-4000-16-12		16	16'-5"	17'-6"	6'-6"	10	5.75			8	1100
512-4000-10-14		10	10'-5"	11'-6"	7'-6"	8	5.25	10	14	8	950
512-4000-12-14		12	12'-5"	13'-6"	7'-6"	8	5.25			8	975
512-4000-14-14		14	14'-5"	15'-6"	7'-6"	10	5.75			8	1125
512-4000-16-14		16	16'-5"	17'-6"	7'-6"	10	5.75			8	1175
512-4000-10-16		10	10'-5"	11'-6"	7'-6"	8	5.25	12	16	8	1000
512-4000-12-16		12	12'-5"	13'-6"	7'-6"	8	5.25			8	1025
512-4000-14-16		14	14'-5"	15'-6"	7'-6"	10	5.75			8	1175
512-4000-16-16		16	16'-5"	17'-6"	7'-6"	10	5.75			8	1225
512-6000-10-10	3-Ton	10	9'-5"	11'-6"	5'-6"	12	6.50	7	10	8	1175
512-6000-12-10		12	11'-5"	13'-6"	5'-6"	12	6.50			8	1200
512-6000-14-10		14	13'-5"	15'-6"	5'-6"	12	6.50			8	1275
512-6000-16-10		16	15'-5"	17'-6"	5'-6"	12	6.50			8	1425

ADJUSTABLE HEIGHT STEEL (K90) (continued)

Part Number	Rated Cap.	Nominal Span (ft.)	Dimensions (in.)					H (ft.)		Caster Dia. (in.)	Weight (lbs.)
			A	B	C	D	E	Min.	Max.		
512-6000-10-12	3-Ton	10	9'-5"	11'-6"	6'-6"	12	6.50	8	12	8	1300
512-6000-12-12		12	11'-5"	13'-6"	6'-6"	12	6.50			8	1375
512-6000-14-12		14	13'-5"	15'-6"	6'-6"	12	6.50			8	1400
512-6000-16-12		16	15'-5"	17'-6"	6'-6"	12	6.50			8	1575
512-6000-10-14		10	9'-5"	11'-6"	7'-6"	12	6.50	10	14	8	1400
512-6000-12-14		12	11'-5"	13'-6"	7'-6"	12	6.50			8	1475
512-6000-14-14		14	13'-5"	15'-6"	7'-6"	12	6.50			8	1525
512-6000-16-14		16	15'-5"	17'-6"	7'-6"	12	6.50			8	1675
512-6000-10-16		10	9'-5"	11'-6"	7'-6"	12	6.50	12	16	8	1500
512-6000-12-16		12	11'-5"	13'-6"	7'-6"	12	6.50			8	1550
512-6000-14-16		14	13'-5"	15'-6"	7'-6"	12	6.50			8	1600
512-6000-16-16		16	15'-5"	17'-6"	7'-6"	12	6.50			8	1750
512-10000-10-10	5-Ton	10	9'-5"	11'-6"	5'-6"	16	7.00	7'-1"	10	8	1375
512-10000-12-10		12	11'-5"	13'-6"	5'-6"	16	7.00			8	1425
512-10000-14-10		14	13'-5"	15'-6"	5'-6"	18	7.50			8	1675
512-10000-16-10		16	15'-5"	17'-6"	5'-6"	18	7.50			8	1750
512-10000-10-12		10	9'-5"	11'-6"	6'-6"	16	7.00	8'-1"	12	8	1550
512-10000-12-12		12	11'-5"	13'-6"	6'-6"	16	7.00			8	1600
512-10000-14-12		14	13'-5"	15'-6"	6'-6"	18	7.50			8	1825
512-10000-16-12		16	15'-5"	17'-6"	6'-6"	18	7.50			8	1925
512-10000-10-14		10	9'-5"	11'-6"	7'-6"	16	7.00	9'-1"	14	8	1650
512-10000-12-14		12	11'-5"	13'-6"	7'-6"	16	7.00			8	1725
512-10000-14-14		14	13'-5"	15'-6"	7'-6"	18	7.50			8	1950
512-10000-16-14		16	15'-5"	17'-6"	7'-6"	18	7.50			8	2050
512-10000-10-16		10	9'-5"	11'-6"	7'-6"	16	7.00	10'-1"	16	8	1725
512-10000-12-16		12	11'-5"	13'-6"	7'-6"	16	7.00			8	1800
512-10000-14-16		14	13'-5"	15'-6"	7'-6"	18	7.50			8	2025
512-10000-16-16		16	15'-5"	17'-6"	7'-6"	18	7.50			8	2125

ADJUSTABLE ALUMINUM (KA90)

Features and Benefits

- Balanced design allows for easy rolling under load.
- Lightweight and simple bolt together construction.
- Includes four poly coated swivel casters.
- Height adjustable in 6" increments.
- Available in 1/2 Ton - 3 Ton. Call for pricing.

