


GAS BOTTLE WEB CRADLES

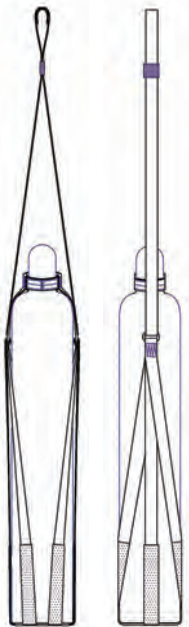

GBS1N

These specialty web cradles allow easy and secure lifting of your gas bottle cylinders into position. Two standard versions are available.

GBS1N automatically adjusts to accommodate 9" Dia. X 50" H to 13" Dia. X 39" H bottles. **GBS2N** is designed for the convenient tandem lifting of one oxygen and one acetylene bottle as used in most welding operations.

- Leather reinforced eyes for extended life.
- Each assembly is rated to lift 1,000 lbs.
- Top assembly collar fits around standard valve caps to secure top of cylinder.
- Square rings connect bottom and top assemblies and allow for automatic adjustment.
- Six legs on bottom assembly surround and secure base of cylinder.
- Abrasion resistant webbing lines both sides of legs at bottom for longer life.
- 2-ply leather base provides additional protection from abrasion and cutting.

The **GBS2N** has the same construction features as the **GBS1N**, but is designed specifically to lift one each of the standard size oxygen and acetylene bottles commonly used in welding operations.



GBS2N

STONE HANDLING SLINGS

Special abrasion resistant 4-inch wide nylon webbing for handling stone, concrete and building panels. *Lift-All* stone handling slings feature a soft abrasion-resistant wear pad woven onto the load side of the webbing, providing outstanding protection for both the sling and the polished stone surfaces.

Features and Benefits

Promotes Safety

- Red core yarn warning system aids in the inspection process.
- *Tuff-Tag*™ provides serial numbered identification for traceability and required OSHA information for the life of the sling.

Saves Money

- Heavy, soft yarns on load side to help protect the sling from abrasion.
- White pile yarns prevent color transfer to load.

Saves Time

- 2-ply version with abrasion resistance on both sides.
- Does not require orientation by the rigger.



Ply	Part Number	Rated Capacity* (lbs.)		
		Vertical	Choker	Basket
One Ply	UU1SH4N	5,400	4,000	10,800
	EE1SH4N	5,400	4,000	10,800
	EN1SH4N	10,800	8,600	21,600
Two Ply	UU2SH4N	9,400	7,000	18,800
	EE2SH4N	9,400	7,000	18,800
	EN2SH4N	10,800	8,600	21,600

Note: Eye/Eye style slings with flat eyes only. Untapered and 12" eye length.

* **WARNING** Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog. **Always protect synthetic slings from being cut by corners and edges. See the Sling Protection section in this catalog.**