

HOW TO ORDER WEB SLINGS

General
Information

Web
Slings

Round
Slings

Sling
Protection

Wire
Rope

Chain
Slings

Rigging
Hardware

Mesh
Slings

Cargo
Control

Lift-All
Hoists

Hoist
Rings

Plate
Clamps

Lifting
Devices

EE 1 8 02 T F X 12

Sling Type

UU - Type U - *Unilink™* Each End
TC - Type 1 - Triangle/Choker
TT - Type 2 - Triangle/Triangle
EE - Type 3 & 4 - Eye/Eye
EN - Endless
RE - Reverse Eye
WL - Wide Lift


Number of Plies

1, 2, 3 or 4

Web Class

1 - *Dura-Web™* 1000
2 - *Dura-Web™* 2000
8 - *Webmaster®* 1600 or *Tuff-Edge®* III
6 - *Webmaster®* 1200
SH - Stone Handling

Always protect synthetic slings from being cut or damaged by corners, edges and protrusions by using protection sufficient for each application.

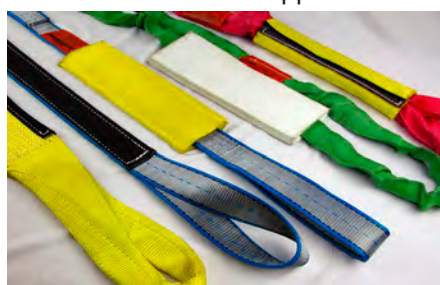

Refer to Sling Protection section in this catalog.

Sling Length

Use actual pull to pull length (reach) in feet.

'X'

Eye Treatment

Flat Eyes (Type 3)

F - Standard
G - Lined Bearing Point
H - Fully Lined
I - Wrapped Bearing Point
J - Fully Wrapped

Twisted Eyes (Type 4)

T - Standard
U - Lined Bearing Point
V - Fully Lined
W - Wrapped Bearing Point
X - Fully Wrapped

Exceptions: Class 1, 2 and SH slings

Tapered Eye Standard

Non-Tapered: 1" and 2" wide slings.
Tapered: 3" wider and up, in Class 6 & 8 slings only.

Note: Other treatments can be accommodated. Please specify at time of order.

Web Material

T - *Tuff-Edge* III
D - Polyester
N - Nylon

Sling Width in inches