
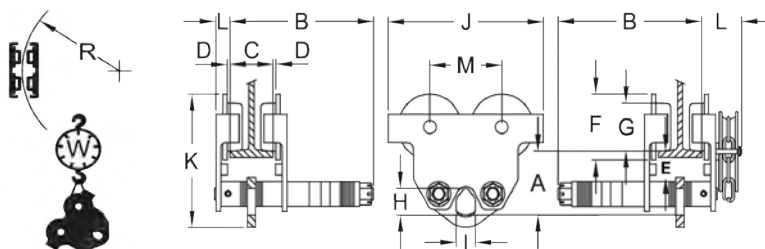


PUSH TROLLEY

- 1/2T to 5T installation and adjustment by rotating the threaded hanger shaft.
- Trolleys up to 5T have a 5:1 design factor and can be used for manual or powered hoists.
- The 10T has a 4:1 design factor and must be derated for powered hoist.
- Machined cast iron wheels with universal tread design to fit flat on tapered beam flanges.
- Low headroom design with precision sealed "lubed for life" bearings assure smooth operation.
- Durable all steel construction with standard safety lugs.
- Meets ASME/ANSI B30.16, OSHA, NASA-STD-8719.9, EU Directives: 2006/42/EC.
- ATEX rated  II 3 GD c IIB 54° C X for limited use in hazardous environments.




Part No.	WLL (Metric Tons)	Dimensions (in.)														Wgt. (lbs.)
		A	B	C Standard	D	E	F	G	H	I	J	K	L	M	R Min	
PT005	1/2	3.3	11.5	1.97 - 8.66	0 - 0.12	1.5	2.3	3.4	1.2	0.9	8.9	6.8	-	4	36	18
PT010	1	3.7	11.8	2.28 - 8.66	0 - 0.12	1.7	2.4	3.7	1.4	0.9	9.9	7.4	-	4.7	40	24
PT020	2	4.4	12.2	2.60 - 8.66	0 - 0.12	1.6	3.2	4.6	1.9	1.0	11.8	8.9	-	5.5	48	40
PT030	3	5.8	12.8	2.91 - 8.66	0 - 0.12	2.5	3.9	5.5	2.3	1.3	14.2	11.4	-	6.3	52	69
PT050	5	6.3	13.0	3.54 - 8.66	0 - 0.12	2.2	4.3	5.9	2.8	1.5	15.4	12.3	-	6.7	56	94
PT100	10	7.5	15.5	4.9 - 12.01	0.08 - 0.13	1.8	7.0	5.4	4.4	2.8	18.1	15.5	1.8	7.9	79	198

BEAM CLAMP



- The easy way to install a fixed hoist mount or rigging point.
- Simple installation by hand, no tools required.
- Compact and portable low headroom design.
- Meets OSHA, ASME B30, NASA-STD-8719.9 and EU Directives: 2006/42/EC.
- Version shown is not advised for use at 15°, 30° or 45° angles. Contact Lift-All for pivoting Beam Clamp.

Part No.	WLL (Metric Tons)	WLL Capacity from 0° Vertical (lbs.)	Dimensions (in.)							Wgt. (lbs.)
			A Adj.	B Max	C	D	E	F Max	H	
BC-10	1	2,200	3.1 - 9.6	14.6	3.7	0.75	7.8	5.6	0.8	7.7
BC-20	2	4,400	3.1 - 9.6	14.6	4.0	0.75	7.8	5.6	0.8	9.9
BC-30	3	6,600	3.5 - 13.0	19.7	5.2	1.12	10.4	7.8	0.9	20.9
BC-50	5	11,000	3.5 - 13.0	19.7	5.6	1.41	10.4	8.2	0.9	24.3
BC-100	10	22,000	3.5 - 13.0	20.6	7.1	1.50	11.2	8.4	1.5	35.2



General Information
Web Sling
Round Sling
Protection Sling
Wire Rope
Chain Sling
Rigging Hardware
Mesh Sling
Cargo Control

Lift-All Hoists

Hoist Rings

Plate Clamps

Lifting Devices