

TUFF-EDGE® III

Patent #

10,494,231 Out of Service Marker

11,021,346 Edge Protection

D908,362 Web Design

General Information
Web Slings
Round Slings
Protection
Sling
Wire Rope
Chain Slings
Rigging Hardware
Mesh Slings
Cargo Control
Lift-All Hoists
Hoist Rings
Plate Clamps
Lifting Devices






The patented design of our *Tuff-Edge III* translates to a softer web with increased abrasion and edge-cut resistance.

The Edge Damage Limit (EDL) out-of-service marker both simplifies the inspection process and also extends the life of the web slings, saving you money. Whenever sling damage is concentrated along the edge of the webbing, the sling may continue to remain in service until the damage has reached the EDL black line marker, assuming the sling is otherwise in good operating condition. If there is any question as to the serviceability to the sling, remove from service.

Features and Benefits

- Soft twill weave body.
- Improved handling characteristics with no coated edge yarns.
- Easy to identify by the blue tubular edges and EDL marker.
- Available in 1" to 12" widths.
- 30% more resistant to edge damage than our *Tuff-Edge II* webbing.
- Tubular edge design with damage-resistant core helps protect the body fibers from cutting, keeping the integrity of the sling intact without compromising its strength.
- Edge Damage Limit (EDL), out-of-service marker aids in sling inspection (refer to TEIII Web Sling Safety Bulletin).

WEB EDGE CUT PERFORMANCE CHART

Webbing Design	Edge Construction	Comparative Web Edge Cut Test Performance Rating	
		Poor	Superior
<i>Tuff-Edge III</i>	Tubular with Reinforced Core		
<i>Tuff-Edge II</i>	Polymer		
<i>Webmaster 1600 Poly</i>	Standard		

WEBMASTER® 1600 NYLON & POLYESTER SLINGS

The Traditional Standard for Heavy Duty Slings

Webmaster 1600 is our most popular web due to strength and service life. This versatile workhorse can be designed in many configurations for a wide variety of lifting applications. Many industries appreciate the value versus strength capabilities of this product line, making it the go-to solution.

Features and Benefits

Promotes Safety


- Red core yarn warning system aids in the inspection process.
- *Tuff-Tag™* provides serial numbered identification for traceability.
- Proven reliability.

Saves Money

- Yellow treatment for abrasion resistance and extended sling life.
- *Tuff-Tag* provides required OSHA information for the life of the sling.

Saves Time

- Polyester web is identified by a single blue surface stripe.

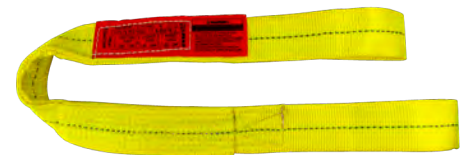

POLYESTER - TYPE 3 FLAT EYES



NYLON - TYPE 4 TWISTED EYES

For details on characteristics of nylon versus polyester webbing, see 'Environmental Considerations' in this section.