

## TUFLEX® ENDLESS ROUNDSLINGS

### The Most Versatile *Tuflex* Roundsling

#### Features and Benefits

Maintains all the basic *Tuflex* features plus...


#### Promotes Safety

- Load stability and balance can be achieved by spreading sling legs.
- EN360 and larger *Tuflex* roundslings feature *Tufhide™* wear-resistant nylon jacket for extra sling life.


#### Saves Money

- Wear points can be shifted to extend sling life.
- The most flexible style of sling.
- Individual slings can be attached together using appropriate hardware.

#### How To Measure

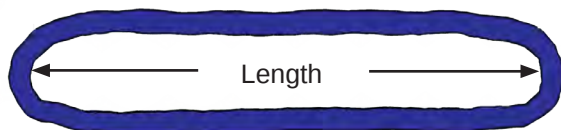

### Tuflex Endless Roundslings

|  | Part Number | Color  | Rated Capacity* (lbs.)                                                              |                                                                                     |                                                                                     |                                                                                     | Min. Length (ft.) | Approximate Measurements |                         |                     |                            |
|--|-------------|--------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------|--------------------------|-------------------------|---------------------|----------------------------|
|  |             |        | Vertical                                                                            | Choker                                                                              | Basket @ 90°                                                                        | Basket @ 45°                                                                        |                   | Weight (lbs./ft.)        | Body Dia. Relaxed (in.) | Contact Width (in.) | Min. Hardware Dia.** (in.) |
|  |             |        |  |  |  |  |                   |                          |                         |                     |                            |
|  | EN30        | Purple | 2,600                                                                               | 2,100                                                                               | 5,200                                                                               | 3,600                                                                               | 1.5               | 0.20                     | 0.63                    | 1.00                | 0.44                       |
|  | EN60        | Green  | 5,300                                                                               | 4,200                                                                               | 10,600                                                                              | 7,400                                                                               | 1.5               | 0.30                     | 0.88                    | 1.38                | 0.63                       |
|  | EN90        | Yellow | 8,400                                                                               | 6,700                                                                               | 16,800                                                                              | 11,800                                                                              | 1.5               | 0.52                     | 1.13                    | 1.75                | 0.75                       |
|  | EN120       | Tan    | 10,600                                                                              | 8,500                                                                               | 21,200                                                                              | 14,000                                                                              | 2.0               | 0.60                     | 1.13                    | 1.88                | 0.88                       |
|  | EN150       | Red    | 13,200                                                                              | 10,600                                                                              | 26,400                                                                              | 18,000                                                                              | 2.0               | 0.76                     | 1.38                    | 2.00                | 1.00                       |
|  | EN180       | White  | 16,800                                                                              | 13,400                                                                              | 33,600                                                                              | 23,000                                                                              | 3.0               | 0.87                     | 1.38                    | 2.13                | 1.13                       |
|  | EN240       | Blue   | 21,200                                                                              | 17,000                                                                              | 42,400                                                                              | 29,000                                                                              | 3.0               | 1.10                     | 1.75                    | 2.63                | 1.19                       |
|  | EN280       | Orange | 25,000                                                                              | 20,000                                                                              | 50,000                                                                              | 35,000                                                                              | 3.0               | 1.25                     | 1.87                    | 3.00                | 1.25                       |
|  | EN360       | Gray   | 31,000                                                                              | 24,800                                                                              | 62,000                                                                              | 43,000                                                                              | 3.0               | 1.70                     | 2.25                    | 3.25                | 1.50                       |
|  | EN460       | Orange | 40,000                                                                              | 32,000                                                                              | 80,000                                                                              | 56,000                                                                              | 3.0               | 2.30                     | 2.50                    | 3.75                | 1.62                       |
|  | EN600       | Brown  | 53,000                                                                              | 42,400                                                                              | 106,000                                                                             | 74,000                                                                              | 8.0               | 2.90                     | 2.75                    | 4.00                | 2.00                       |
|  | EN800       | Olive  | 66,000                                                                              | 52,800                                                                              | 132,000                                                                             | 93,000                                                                              | 8.0               | 3.40                     | 3.13                    | 4.63                | 2.13                       |
|  | EN900       | Orange | 77,000                                                                              | 61,600                                                                              | 154,000                                                                             | 108,000                                                                             | 8.0               | 3.90                     | 3.42                    | 5.00                | 2.25                       |
|  | EN1000      | Black  | 90,000                                                                              | 72,000                                                                              | 180,000                                                                             | 127,000                                                                             | 8.0               | 4.40                     | 3.63                    | 5.25                | 2.50                       |
|  | EN1100      | Orange | 100,000                                                                             | 80,000                                                                              | 200,000                                                                             | 140,000                                                                             | 8.0               | 4.80                     | 4.10                    | 5.50                | 2.62                       |

\*\* This is the minimum recommended diameter for the connection hardware to be used for a vertical hitch.

\* **WARNING** Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog. **Always protect synthetic slings from being cut by corners and edges. See the Sling Protection section in this catalog.**