

TUFLEX® EYE AND EYE

A More Rugged and Durable **Tuflex** Roundsling

The Eye and Eye Advantage

An additional jacket of texturized, abrasion resistant nylon covers the *Tuflex* body forming two color-coded lifting eyes.

Features and Benefits

Maintains all the basic *Tuflex* features plus...


Promotes Safety

- EN360 and larger *Tuflex* roundslings feature *Tufhide* wear-resistant nylon jacket for extra sling life.

Saves Money

- Saves money by extending sling life in abrasive environments.

How To Measure

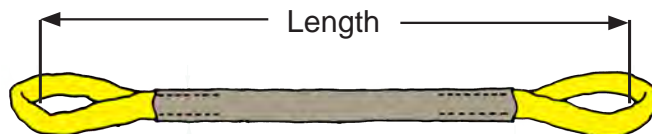

Tuflex Eye/Eye Roundslings

Part Number	Eye Color	Rated Capacity (lbs.)*				Min. Length ⁺ (ft.)	Approximate Measurements			
		Vertical	Choker	Basket @ 90°	Basket @ 45°		Weight (lbs./ft.)	Contact Width (in.)	Eye Length (in.)	Min. Hardware Dia ^{**} (in.)
EE30	Purple	2,600	2,100	5,200	3,600	4	0.25	2.25	10	0.44
EE60	Green	5,300	4,200	10,600	7,400	4	0.35	2.50	10	0.63
EE90	Yellow	8,400	6,700	16,800	11,800	4	0.55	2.50	12	0.75
EE120	Tan	10,600	8,500	21,200	14,900	5	0.66	3.50	12	0.88
EE150	Red	13,200	10,600	26,400	18,600	5	0.81	3.50	14	1.00
EE180	White	16,800	13,400	33,600	23,000	7	0.93	3.50	16	1.13
EE240	Blue	21,200	17,000	42,400	29,000	7	1.20	3.50	16	1.19
EE280	Orange	25,000	20,000	50,000	35,000	7	1.30	4.25	18	1.25
EE360	Gray	31,000	24,800	62,000	43,000	7	1.75	4.50	20	1.50
EE460	Orange	40,000	32,000	80,000	56,000	7	2.35	6.00	22	1.62
EE600	Brown	53,000	42,400	106,000	74,000	8	2.90	7.00	24	2.00
EE800	Olive	66,000	52,800	132,000	93,000	10	3.45	8.00	30	2.13
EE900	Orange	77,000	61,600	154,000	108,000	10	3.95	8.00	32	2.25
EE1000	Black	90,000	72,000	180,000	127,000	12	4.45	9.00	36	2.50
EE1100	Orange	100,000	80,000	200,000	140,000	12	4.85	9.00	36	2.62

** This is the minimum recommended diameter for the connection hardware to be used for a vertical hitch.

+ Shorter lengths available using reduced eye lengths.

*** WARNING** Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog. **Always protect synthetic slings from being cut by corners and edges. See the Sling Protection section in this catalog.**