

SYNTHETIC WEB BRIDLE SLINGS

Bridle Slings are useful when fixed lifting points are available

Features and Benefits

Promotes Safety

- *Tuff-Edge*® III web material is standard; helps prevent sling damage.
- Better load control and balance by using fixed connection points and multiple legs.
- Standard oblong links and hooks are forged from alloy steel for strength and reliability.
- Red core yarn warning system aids in the inspection process.
- Use of hardware prevents cutting and abrasion of sling at bearing points.
- *Tuff-Tag*™ provides serial numbered identification for traceability.
- Proven reliability.
- Wide widths available up to 12".

Saves Money


- Soft web sling legs protect load.
- Endless configuration allows shifting of wear points.
- *Tuff-Edge* III material extends sling life.
- Sling hooks and links can be re-webbed.
- *Tuff-Tag* provides required OSHA information for the life of the sling.
- Tapered eyes for better sling leg equalization, standard for 2" or wider.




Saves Time

- Lighter weight and easier to use than chain or wire rope.
- Sling hooks quickly connect to loads having hoist rings or eye bolts.

HOW TO ORDER WEB BRIDLE SLINGS

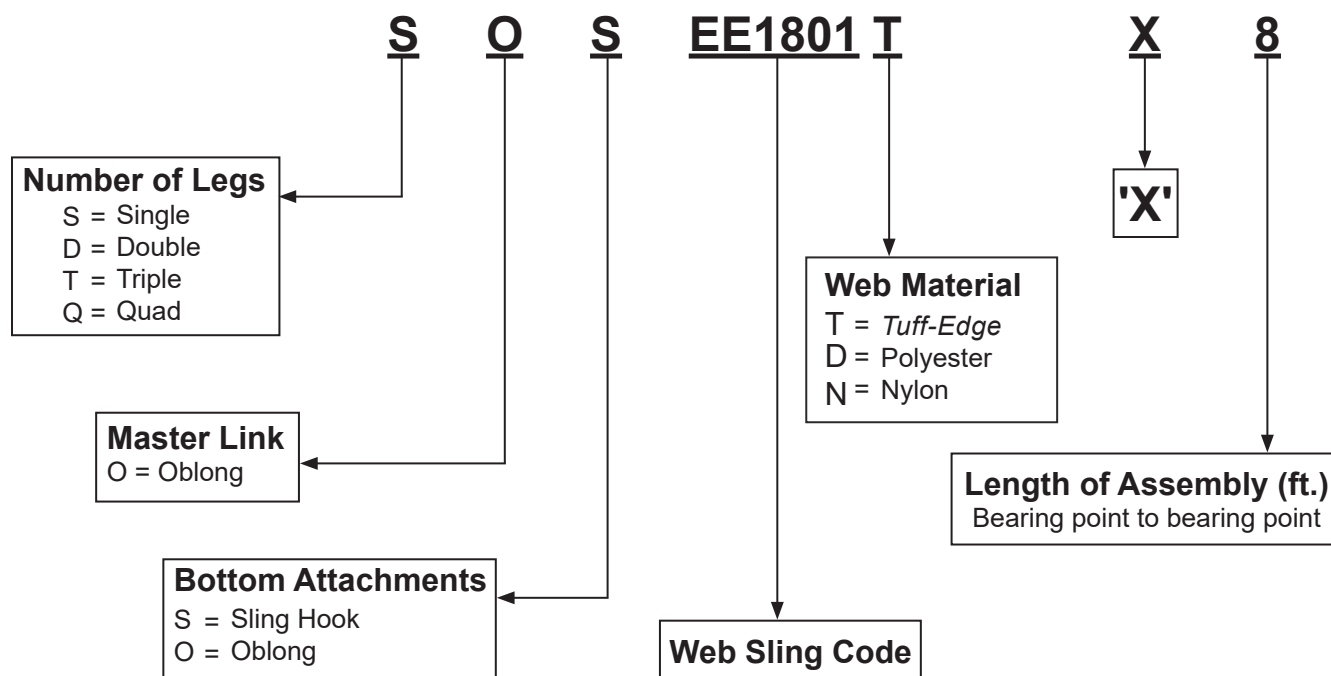

SYNTHETIC WEB BRIDLE SLINGS

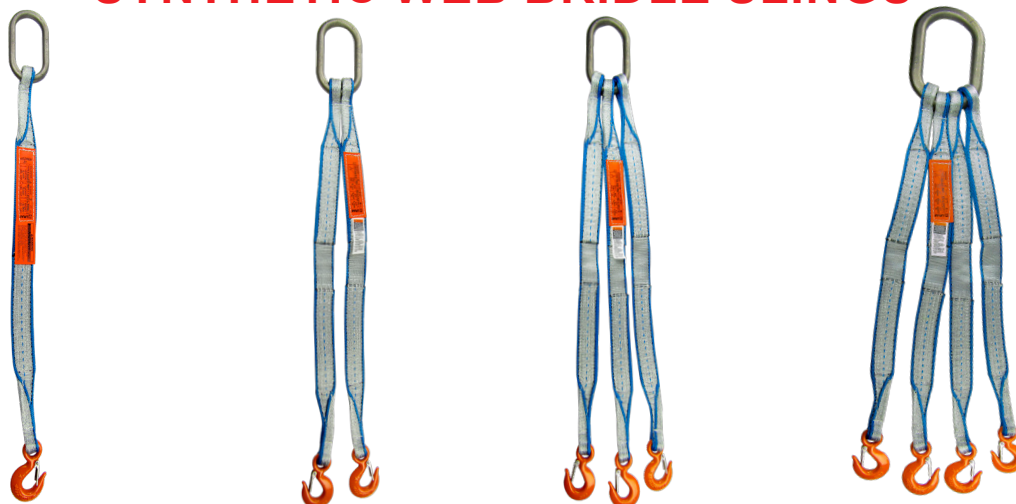

Web Bridle Slings

Part No. For Web Sling Legs	Web Width (in.)	Web Plies	Number of Legs	Rated Capacity* (lbs.)						Alloy Sling Hook Size	Oblong Link Dia. (in.)
				Vertical	Choker	Basket	60°	45°	30°		
EE1801*	1	1	Single	1,600	1,280	3,200	–	–	–	1-Ton Alloy	1/2
	1	1	Double	–	–	–	2,700	2,200	1,600	1-Ton Alloy	1/2
	1	1	Triple	–	–	–	4,100	3,300	2,400	1-Ton Alloy	3/4
	1	1	Quad	–	–	–	5,500	4,500	3,200	1-Ton Alloy	1
EE2801*	1	2	Single	3,000	2,400	6,000	–	–	–	1-1/2 Ton Alloy	1/2
	1	2	Double	–	–	–	5,100	4,200	3,000	1-1/2 Ton Alloy	1/2
	1	2	Triple	–	–	–	7,700	6,300	4,500	1-1/2 Ton Alloy	3/4
	1	2	Quad	–	–	–	10,300	8,400	6,000	1-1/2 Ton Alloy	1
EE1802*	2	1	Single	3,000	2,400	6,000	–	–	–	1-1/2 Ton Alloy	1/2
	2	1	Double	–	–	–	5,100	4,200	3,000	1-1/2 Ton Alloy	1/2
	2	1	Triple	–	–	–	7,700	6,300	4,500	1-1/2 Ton Alloy	3/4
	2	1	Quad	–	–	–	10,300	8,400	6,000	1-1/2 Ton Alloy	1
EE2802*	2	2	Single	6,000	4,800	12,000	–	–	–	3-Ton Alloy	3/4
	2	2	Double	–	–	–	10,300	8,400	6,000	3-Ton Alloy	1
	2	2	Triple	–	–	–	15,500	12,700	9,000	3-Ton Alloy	1
	2	2	Quad	–	–	–	20,700	16,900	12,000	3-Ton Alloy	1-1/4

Note: Hardware capacities correspond to the appropriate sling capacities. See hardware dimensions in Rigging Hardware section in this catalog. Import hooks with latches are standard. Contact *Lift-All* for domestic hook and latch options.

*



WARNING

Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog. **Always protect synthetic slings from being cut by corners and edges. See the Sling Protection section in this catalog.**

- General Information
- Web Slings
- Round Slings
- Sling Protection
- Wire Rope
- Chain Slings
- Rigging Hardware
- Mesh Slings
- Load Huggers
- Tow Products
- Lift-All Hoists
- Hoist Rings
- Plate Clamps
- Lifting Devices