
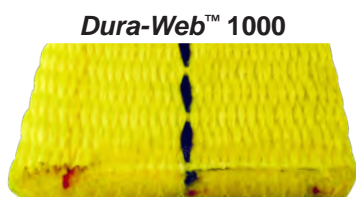
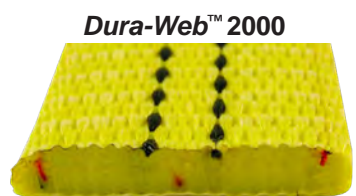
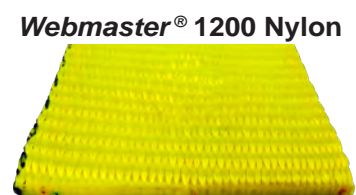
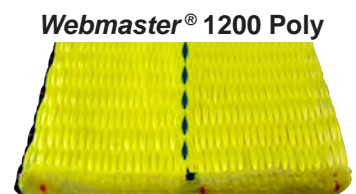
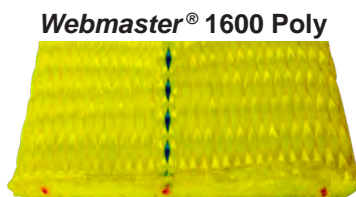


LIFT-ALL WEB SELECTOR

General Information
Web Slings
Round Slings
Sling Protection
Wire Rope
Chain Slings
Rigging Hardware
Mesh Slings
Cargo Control
Lift-All Hoists
Hoist Rings
Plate Clamps
Lifting Devices

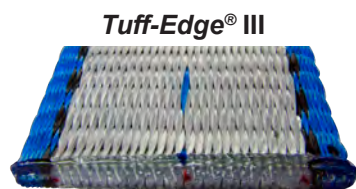

Approx. Thickness	Single-Ply Capacity Per Inch of Width	Material	Identifier	Applications*
0.156"	1600 lbs.	Polyester	Silver blue edge with Edge Damage Limit (EDL) markers and center stripe.	Light to heavy duty. 30% more resistant to edge damage than our <i>Tuff-Edge II</i> webbing.
0.156"	1600 lbs.	Polyester	Yellow with blue center stripe.	Moderate duty. Polyester stretches less for better load control and reduced abrasion.
0.156"	1600 lbs.	Nylon	Yellow with no center stripe.	Moderate duty. Nylon stretches more to help avoid shock loading.
0.125"	1200 lbs.	Polyester	Yellow with black edge marker and blue center stripe.	Light to moderate duty. Polyester stretches less for better load control, reduced abrasion.
0.125"	1200 lbs.	Nylon	Yellow with black edge marker and no center stripe.	Light to moderate duty. Nylon stretches more to help avoid shock loading.
0.3125"	2000 lbs.	Nylon	Yellow with two black center stripes.	Moderate to heavy duty. Abrasion resistant yarns cover surface.
0.1875"	1000 lbs.	Nylon	Yellow with one black center stripe.	Light to moderate duty. Abrasion resistant yarns cover entire surface.

* **WARNING** Always protect synthetic slings from being cut by corners and edges. See Sling Protection section in this catalog.