

WEB SLING HARDWARE

General
Information

Web
Slings

Round
Slings

Sling
Protection

Wire
Rope

Chain
Slings

Rigging
Hardware

Mesh
Slings

Cargo
Control

Lift-All
Hoists

Hoist
Rings


Plate
Clamps

Lifting
Devices

Web-Trap™ Steel Sling Hardware - Triangles & Chokers

A significant improvement in triangle/choker design, *Web-Trap* fittings feature positive web capture to eliminate web slippage. These fittings are manufactured from alloy steel for lighter sling weight and a powder-coated finish to inhibit rust.

Web-Trap locks webbing to center of hardware.

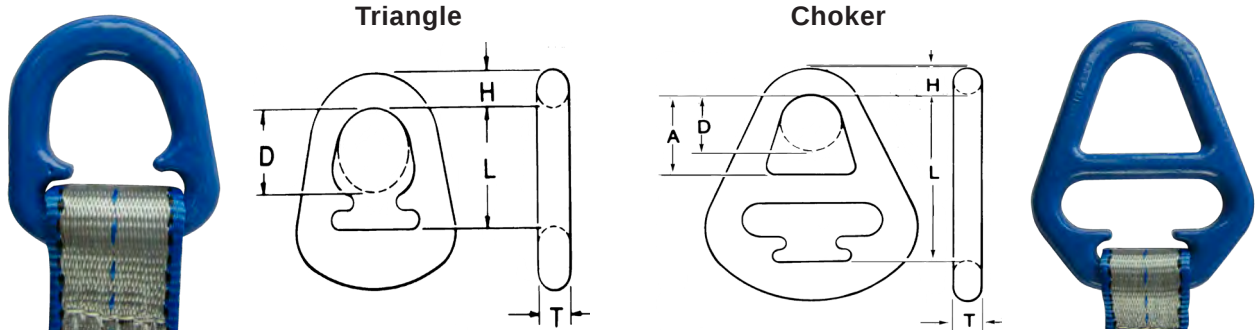

ALLOY STEEL FOR 1-PLY & 2-PLY SLINGS

Web-Trap Triangles						Web-Trap Chokers						
Web Width	Dimensions (in.)				Weight (lbs.)	Web Width	Dimensions (in.)					Weight (lbs.)
	L	D	T	H			L	A	D	T	H	
*2"	2.38	1.75	0.56	0.63	1.0	*2"	5.00	2.44	1.75	0.56	0.69	1.9
*3"	3.44	2.00	0.50	0.75	1.9	*3"	6.25	3.38	2.00	0.50	0.75	3.6
*4"	4.13	2.38	0.50	0.81	2.8	*4"	7.00	4.00	2.38	0.50	0.81	5.1
6"	5.56	3.13	0.50	1.06	6.3	6"	8.88	4.75	3.13	0.50	1.06	12

* Unilink is the standard fitting - triangle and chokers available on special order only.

ALLOY STEEL FOR 1-PLY SLINGS

Web-Trap Triangles						Web-Trap Chokers						
Web Width	Dimensions (in.)				Weight (lbs.)	Web Width	Dimensions (in.)					Weight (lbs.)
	L	D	T	H			L	A	D	T	H	
8"	6.50	4.0	0.50	1.25	8	8"	11.25	7.50	4.00	0.50	1.44	16
10"	8.25	5.0	0.75	1.44	16	10"	12.88	8.25	5.00	0.75	1.50	28
12"	8.75	5.5	0.75	1.75	20	12"	14.50	10.0	5.50	0.75	1.75	40

ALLOY STEEL FOR 2-PLY SLINGS

Web-Trap Triangles						Web-Trap Chokers						
Web Width	Dimensions (in.)				Weight (lbs.)	Web Width	Dimensions (in.)					Weight (lbs.)
	L	D	T	H			L	A	D	T	H	
8"	6.50	4.0	0.75	1.25	12	8"	11.25	7.50	4.0	0.75	1.44	25
10"	8.25	5.0	1.0	1.44	21	10"	12.88	8.25	5.0	1.0	1.50	38
12"	8.75	5.5	1.0	1.75	27	12"	14.50	10.0	5.50	1.0	1.75	54