

## E-Z FLEX™ CABLE LAID SLINGS


E-Z Flex slings are made from a machine laid rope that consists of seven individual, galvanized ropes.

### Features and Benefits


Maintains all the basic *Lift-All* wire rope sling features plus...

#### Saves Money


- Superior flexibility - resists damage from kinking.
- Galvanized coating for corrosion resistance and longer life.



7X7X7



7X7X19



### Standard Combinations

Rope Diameter (in.)	Rated Capacity* (tons)			**Min. Sling Length	Standard Eye Size (in.) W X L	Thimbled Eye Size (in.) W X L	Eye Hook Cap. (tons)	Crescent Thimble Eye Size (in.) W X L	Slip Thru Thimble Eye Size (in.) W X L	Sliding Choker Hook (in.)	
	Vertical	Choker	Vertical Basket								
7X7X7	1/4	.50	.34	1.0	1'-6"	2 X 4	.88 X 1.63	1	2 X 4	2.13 X 4.13	3/8
	3/8	1.1	.74	2.2	2'-0"	3 X 6	1.13 X 2.125	1.5	2 X 4	2.13 X 4.13	3/8
	1/2	1.9	1.3	3.7	2'-6"	4 X 8	1.5 X 2.75	2	2.25 X 6	2.38 X 4.38	1/2
	5/8	2.8	1.9	5.5	3'-0"	5 X 10	1.75 X 3.25	3	2.75 X 7	3.38 X 6.63	5/8
6X19X7	3/4	4.1	2.8	8.1	3'-6"	6 X 12	2 X 3.75	4.5	3.25 X 8.5	3.38 X 6.63	3/4
	7/8	5.4	3.7	11	4'-0"	7 X 14	2.25 X 4.25	7	4.5 X 10	3.75 X 7.13	7/8
	1	6.9	4.7	14	4'-6"	8 X 16	2.5 X 4.5	7	4.5 X 11.5	3.75 X 7.13	1
	1-1/8	8.3	5.8	17	5'-0"	9 X 18	2.88 X 5.13	11	4.88 X 13	4.38 X 8.38	1-1/8
	1-1/4	9.9	7.0	20	5'-6"	10 X 20	3.5 X 6.5	11	5.5 X 14.5	4.38 X 8.38	1-1/4
	1-1/2	13	9.1	26	7'-0"	12 X 24	3.5 X 6.25	15	6 X 17.5	5 X 9.5	1-1/2

\*\*Minimum sling length when using standard eyes. Basket ratings are based on a minimum D/d of 10.

Other fittings are available upon request. Hooks with latches are standard on import assemblies; optional on domestic.

\* **WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog.

General Information  
Web Slings  
Round Slings  
Sling Protection  
Wire Rope  
Chain Slings  
Rigging Hardware  
Mesh Slings  
Load Huggers  
Tow Products  
Lift-All Hoists  
Hoist Rings  
Plate Clamps  
Lifting Devices

## E-Z FLEX™ TWO LEG BRIDLE SLINGS

### Features and Benefits

Maintains all the basic *Lift-All* wire rope sling features plus...

#### Promotes Safety

- Bridles provide better load control and balance.

#### Saves Time


- Easier rigging when hooking into fixed lifting points.
- Sliding choker hook speeds rigging of bundled materials.

#### Saves Money

- Excellent flexibility - resists damage from kinking.
- Galvanized coating for corrosion resistance and longer life.
- Alloy steel hardware assures long life.

**⚠ WARNING**

Do not lift with hook in splice area as sling damage may occur.

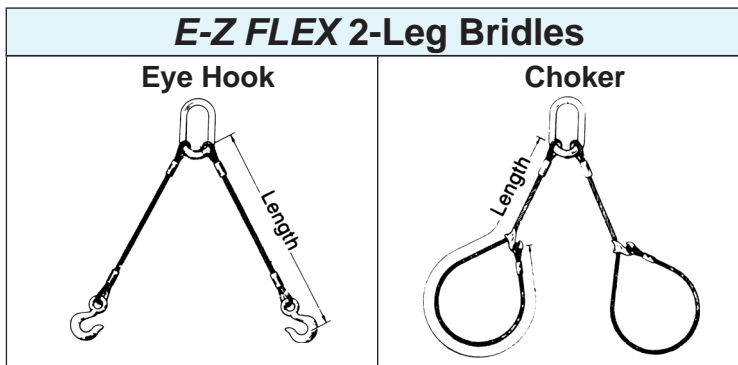

		Rated Capacity* (tons)						**Min. Sling Length			
		60°	45°	30°	60°	45°	30°				
7X7X7	1/4	.87	.71	.50	.60	.49	.34	1'-3"	1/2	1	3/8
	3/8	1.9	1.5	1.1	1.3	1.0	.74	1'-8"	1/2	1-1/2	3/8
	1/2	3.2	2.6	1.9	2.2	1.8	1.3	2'-0"	3/4	2	1/2
	5/8	4.8	3.9	2.8	3.3	2.7	1.9	2'-4"	1	3	5/8
7X7X19	3/4	7.0	5.8	4.1	4.8	3.9	2.8	2'-9"	1	4-1/2	3/4
	7/8	9.4	7.6	5.4	6.4	5.2	3.7	3'-3"	1	7	7/8
	1	12	9.7	6.9	8.2	6.7	4.7	3'-6"	1 1-1/4	7	1
	1-1/8	14	12	8.3	10	8.2	5.8	4'-0"	1-1/2	11	1-1/8
	1-1/4	17	14	9.9	12	9.8	7.0	4'-6"	1-1/2	11	1-1/4
	1-1/2	22	18	13	15	13	9.1	5'-6"	2	15	1-1/2

\*\* Minimum length based on thimble eye and eye hook.

\* **⚠ WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog.

## E-Z FLEX™ ENDLESS SLINGS

### Features and Benefits

Maintains all the basic *Lift-All* wire rope sling features plus...

#### Promotes Safety


- Load stability and balance achieved by spreading sling legs in basket and choker hitches.

#### Saves Money


- Wear points can be shifted to extend sling life.
- Smaller rope diameter per capacity increases flexibility.

#### Saves Time

- Ideal for turning loads.
- More flexible than eye slings of comparable strength.

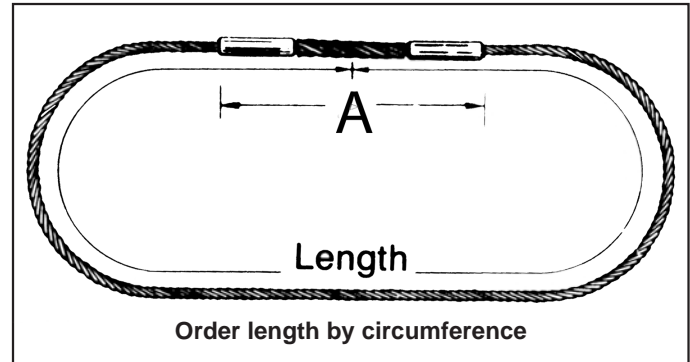

Note: Three sleeves used on 3/4" diameter and larger.

E-Z FLEX Endless Slings						
 Rope Dia. (in.)	Rated Capacity* (tons)			Min. Sling Length	Splice Length A (in.)	
	Vertical	Choker	Vertical Basket			
7X7X7	1/4	.83	.54	1.7	2'-3"	10
	3/8	1.8	1.2	3.6	3'-0"	10
	1/2	3.0	2.0	6.1	4'-0"	12
	5/8	4.6	3.0	9.1	5'-0"	12
7X7X19	3/4	6.7	4.3	13	6'-0"	18
	7/8	8.9	5.8	18	7'-0"	18
	1	11	7.3	23	8'-0"	20

Vertical and Basket ratings are based on a minimum D/d of 5.

**⚠ WARNING**  
Do not lift with hook in splice area as sling damage may occur.

\* **⚠ WARNING** Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog.

- General Information
- Web Slings
- Round Slings
- Sling Protection
- Wire Rope
- Chain Slings
- Rigging Hardware
- Mesh Slings
- Load Huggers
- Tow Products
- Lift-All Hoists
- Hoist Rings
- Plate Clamps
- Lifting Devices