
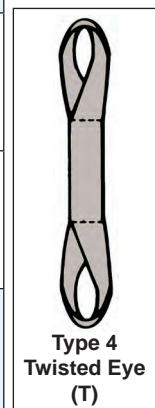


## TUFF-EDGE® III & WEBMASTER® 1600 SLINGS

EYE / EYE SLINGS**							
Ply	Tuff-Edge III Part No.	Webmaster 1600 Polyester Part No.	Webmaster 1600 Nylon Part No.	Web Width (in.)	Rated Capacity* (lbs.)		
					Vertical	Choker	V. Basket
One Ply	EE1801TF	EE1801DF	EE1801NF	1	1,600	1,280	3,200
	EE1802TF	EE1802DF	EE1802NF	2	3,200	2,500	6,400
	EE1803TF	EE1803DF	EE1803NF	3	4,800	3,800	9,600
	EE1804TF	EE1804DF	EE1804NF	4	6,400	5,000	12,800
	EE1806TF	EE1806DF	EE1806NF	6	9,600	7,700	19,200
	EE1808TF	EE1808DF	EE1808NF	8	12,800	10,200	25,600
	EE1810TF	EE1810DF	EE1810NF	10	16,000	12,800	32,000
	EE1812TF	EE1812DF	EE1812NF	12	19,200	15,400	38,400
Two Ply	EE2801TF	EE2801DF	EE2801NF	1	3,200	2,500	6,400
	EE2802TF	EE2802DF	EE2802NF	2	6,400	5,000	12,800
	EE2803TF	EE2803DF	EE2803NF	3	8,800	7,040	17,600
	EE2804TF	EE2804DF	EE2804NF	4	11,500	9,200	23,000
	EE2806TF	EE2806DF	EE2806NF	6	16,500	13,200	33,000
	EE2808TF	EE2808DF	EE2808NF	8	19,200	15,400	38,400
	EE2810TF	EE2810DF	EE2810NF	10	22,400	17,900	44,800
	EE2812TF	EE2812DF	EE2812NF	12	26,900	21,500	53,800
Three Ply	EE3801TF	EE3801DF	EE3801NF	1	4,100	3,300	8,200
	EE3802TF	EE3802DF	EE3802NF	2	8,300	6,600	16,600
	EE3803TF	EE3803DF	EE3803NF	3	12,500	10,000	25,000
	EE3804TF	EE3804DF	EE3804NF	4	16,000	12,800	32,000
	EE3806TF	EE3806DF	EE3806NF	6	23,000	18,400	46,000
	EE3808TF	EE3808DF	EE3808NF	8	30,700	24,500	61,400
	EE3810TF	EE3810DF	EE3810NF	10	36,800	29,400	73,600
	EE3812TF	EE3812DF	EE3812NF	12	44,000	35,200	88,000
Four Ply	EE4801TF	EE4801DF	EE4801NF	1	5,000	4,000	10,000
	EE4802TF	EE4802DF	EE4802NF	2	10,000	8,000	20,000
	EE4803TF	EE4803DF	EE4803NF	3	14,900	11,900	29,800
	EE4804TF	EE4804DF	EE4804NF	4	19,800	15,800	39,600
	EE4806TF	EE4806DF	EE4806NF	6	29,800	23,800	59,600
	EE4808TF	EE4808DF	EE4808NF	8	39,700	31,700	79,400
	EE4810TF	EE4810DF	EE4810NF	10	49,600	39,600	99,200
	EE4812TF	EE4812DF	EE4812NF	12	59,500	47,600	119,000

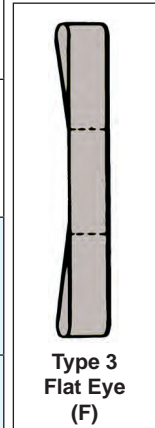

\*\* Replace the F with a T for Twisted Eyes (Type 4).

Eyes on Type 3 and Type 4 slings are tapered at 3" and wider, unless otherwise specified.

EYE LENGTH – APPLIES TO ALL SLINGS								
Plies of Web	Sling Width (in.)							
	1	2	3	4	6	8	10	12
1	8.5	10	11	12	16	20	24	24
2	8.5	10	11	12	16	20	24	24
3	10.0	12	14	16	18	24	24	24
4	10.0	12	14	16	18	24	24	24

\*



Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog. **Always protect synthetic slings from being cut by corners and edges. See the Sling Protection section in this catalog.**

General Information  
Web Slings  
Round Slings  
Sling Protection  
Wire Rope  
Chain Slings  
Rigging Hardware  
Mesh Slings  
Load Huggers  
Tow Products  
Lift-All Hoists  
Hoist Rings  
Plate Clamps  
Lifting Devices


## TUFF-EDGE<sup>®</sup> III & WEBMASTER<sup>®</sup> 1600 SLINGS

ENDLESS							
Ply	Tuff-Edge III Part No.	Webmaster 1600 Polyester Part No.	Webmaster 1600 Nylon Part No.	Web Width (in.)	Rated Capacity* (lbs.)		
					Vertical	Choker	V. Basket
One Ply	EN1801T	EN1801D	EN1801N	1	3,200	2,500	6,400
	EN1802T	EN1802D	EN1802N	2	6,400	5,000	12,800
	EN1803T	EN1803D	EN1803N	3	8,800	7,040	17,600
	EN1804T	EN1804D	EN1804N	4	11,500	9,200	23,000
	EN1806T	EN1806D	EN1806N	6	16,500	13,200	33,000
	EN1808T	EN1808D	EN1808N	8	19,200	15,400	38,400
	EN1810T	EN1810D	EN1810N	10	22,400	17,900	44,800
	EN1812T	EN1812D	EN1812N	12	26,900	21,500	53,800
Two Ply	EN2801T	EN2801D	EN2801N	1	6,200	4,900	12,400
	EN2802T	EN2802D	EN2802N	2	12,400	9,900	24,800
	EN2803T	EN2803D	EN2803N	3	16,300	13,000	32,600
	EN2804T	EN2804D	EN2804N	4	20,700	16,500	41,400
	EN2806T	EN2806D	EN2806N	6	30,500	24,400	61,000
	EN2808T	EN2808D	EN2808N	8	40,000	32,000	80,000
	EN2810T	EN2810D	EN2810N	10	47,000	37,600	94,000
	EN2812T	EN2812D	EN2812N	12	56,000	44,800	112,000
Three Ply	EN3801T	EN3801D	EN3801N	1	8,000	6,400	16,000
	EN3802T	EN3802D	EN3802N	2	16,000	12,800	32,000
	EN3803T	EN3803D	EN3803N	3	21,500	17,200	43,000
	EN3804T	EN3804D	EN3804N	4	28,700	23,000	57,400
	EN3806T	EN3806D	EN3806N	6	40,700	32,500	81,400
	EN3808T	EN3808D	EN3808N	8	46,000	36,800	92,000
	EN3810T	EN3810D	EN3810N	10	51,500	41,200	103,000
	EN3812T	EN3812D	EN3812N	12	59,200	47,300	118,400
Four Ply	EN4801T	EN4801D	EN4801N	1	10,000	8,000	20,000
	EN4802T	EN4802D	EN4802N	2	19,800	15,800	39,600
	EN4803T	EN4803D	EN4803N	3	26,700	21,300	53,400
	EN4804T	EN4804D	EN4804N	4	35,600	28,400	71,200
	EN4806T	EN4806D	EN4806N	6	50,500	40,400	101,000
	EN4808T	EN4808D	EN4808N	8	57,600	46,000	115,200
	EN4810T	EN4810D	EN4810N	10	67,200	53,700	134,400
	EN4812T	EN4812D	EN4812N	12	80,700	64,500	161,400

Note: Type 5 (Endless) slings are not tapered unless specified.

### Tuflex<sup>®</sup> is an Alternative...

For 3-ply and 4-ply slings wider than 6", Tuflex Roundslings should be seriously considered. Tuflex offers increased flexibility, ease of use and lower cost.

\*  **WARNING** Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog. **Always protect synthetic slings from being cut by corners and edges. See the Sling Protection section in this catalog.**